

 **MITSUBISHI MOTORS**

M.U.T.-III Owner's Manual

Multi Use Tester

< Ver. 4 >



Heart-Beat Motors



MITSUBISHI MOTORS

M.U.T.-III User's Manual

Foreword

This manual explains M.U.T.-III: functions, operating procedures, and other related information. By reading this manual you will obtain a basic understanding of M.U.T.-III and Vehicle Communication Interface (hereafter abbreviated as V.C.I.) functions and methods of operation. Because there are differences in M.U.T.-III methods of operation due to the vehicle electronic control system, be sure to read this manual and Online Help prior to operation. This manual was written based on the June 2005 version of the M.U.T.-III system. Please note that the information herein may not always agree with your version of the M.U.T.-III system due to system specification changes and version upgrades. Please take good care of this manual along with your M.U.T.-III product.

Table of Contents

Chapter 1 Product Overview	1
1-1. Precautions.....	1
1-2. V.C.I. Outline Drawing and Component Names.....	2
1-3. M.U.T.-III Components Explanations	3
1-4. Harness Connection Method	5
1-5. Combination Chart of Harness and Vehicle	6
Chapter 2 M.U.T.-III Functions	8
2-1. Basic Functions	8
2-2. V.C.I. Functions	9
Chapter 3 Operating M.U.T.-III	10
3-1. Starting and Shutting the M.U.T.-III System	10
3-2. Screen Explanations.....	11
3-3. Basic Flow to Start Diagnosis	13
3-4. Option Settings	16
3-5. Useful Functions.....	17
Chapter 4 Diagnosis Function	18
4-1. Diagnostic Trouble Code	18
4-2. Data List (Service Data monitor).....	19
4-3. Actuator Test.....	22
Chapter 5 Special Function (Calibration & Setting)	25
5-1. ECU Information	25
5-2. Learned Value Reset	25
5-3. Seat Weight Sensor Accuracy Check	26
5-4. Steering Angle Sensor Calibration	28
5-5. Lateral G sensor Calibration	30
5-6. TPMS ID Registration and Checking	31
Chapter 6 Drive Recorder	34
6-1. How to Record the Data	34
6-2. Recorded Data Handling	46
6-3. Display and Analysis of the Recorded Data.....	51
Chapter 7 SWS Monitor	57
7-1. SWS Monitor Operation.....	57
Chapter 8 Coding Function	63
8-1. VIN Writing Function.....	63

Chapter 9 CAN Bus Diagnosis	65
9-1. Diagnosing the CAN Bus	65
Chapter 10 ECU Reprogramming	66
10-1. Process Flow Chart	66
10-2. Equipments.....	67
10-3. Data preparation on PC from Update CD-ROM.....	68
10-4. Reprogramming Operation (V.C.I. alone).....	69
10-5. Reprogramming Operation (V.C.I. - PC connected).....	76
10-6. Reprogramming by CAN communication.....	80
10-7. Troubleshooting of Reprogramming.....	82
Chapter 11 Measurement Functions	85
11-1. Injector-Type Fuel Consumption Measurement	85
11-2. Fuel pressure, Voltage, Ohmmeter, Oscilloscope	87
Chapter 12 Troubleshooting Procedures	90
12-1. Individual Troubleshooting Procedures.....	90
Chapter 13 Reference Material	92
13-1. V.C.I. Electrical Properties	92
Appendix	93
<< Terminology >>	93
<< Screen Button Explanations >>	95

For Your Safety

For Your Safety

To ensure proper use of this product and prevent personal injury and property damage, various graphic displays are used in the user's manual. The graphic displays and respective meanings are described below.

 Warning	Warning messages alert you to a procedure or practice which, if not followed correctly, could lead to death or serious injury.
 Caution	Caution messages alert you to a procedure or practice which, if not followed correctly, could lead to serious injury and/or property damage.

Icon Examples	The  symbol alerts you to a prohibited action.
	The  symbol alerts you to an action that must be enforced.

 Warning	
<p>Drivers should not operate the unit while driving.</p> <ul style="list-style-type: none"> Operating the unit while driving may result in a traffic accident. 	<p>Do not plug in or unplug the power AC adapter with wet hands.</p> <ul style="list-style-type: none"> Doing so results in the risk of electric shock.
<p>When using the cigarette lighter plug to supply power to the V.C.I. unit, be sure the power voltage supplied is DC32V or less.</p> <ul style="list-style-type: none"> Applying a voltage greater than DC32V results in the risk of fire. M.U.T.-III as provided to dealers includes 12V accessory / cigarette lighter plug adapter to power M.U.T.-III during extended test drives. 	<p>Maximum voltage the V.C.I. can withstand is 40V. Do not use the V.C.I. on systems greater than the 32-volt system mentioned previously.</p> <ul style="list-style-type: none"> Violating this requirement results in the risk of a ground fault, damage and/or electric shock.

For Your Safety



Warning

The V.C.I. screen is liquid crystal display or LCD. In the unlikely event that the display breaks due to impact, do not let your skin come in contact with the LCD fluid.

- If your skin comes in contact with the LCD fluid, wash your skin thoroughly with water. If skin rash or abnormality occurs seek medical attention from a doctor.

Do not use the unit if the power AC adapter plug or cord is damaged or plugging into the outlet is loose.

- Use under such conditions may result in electric shock, an electric short and/or fire.



Be sure to hold the harness connector when disconnecting from the vehicle. Do not disconnect the harness by pulling on the cord.

- Pulling the cord rather than the connector may result in damage to the lead wire inside the cord, thereby causing a short and possibly starting a fire.



Unplug the power AC adapter from the outlet when the unit is not in use.

- Failure to do so may result in injury, burns, electric shock caused by insulation deterioration, or fire due to a short circuit.



Warning

When the harness is connected to the V.C.I., be sure to check the top and bottom of the connector and connect the harness perpendicularly to the connector of the V.C.I. Connecting at an angle may result in bending of the pins of the connector.

Check for the secure connection of the harness before tightening of the screw locks.

- **The bent pin may contact the connector case, thereby causing an electric short which leads to damage to the V.C.I.**



For Your Safety

Please Note

Do not expose the PC or V.C.I. to direct sunlight or high temperatures, or leave the unit in sun-heated cars. Such action may result in system failure.

Store the PC and V.C.I. in a dry environment at room temperatures.

Moving the PC and V.C.I. to a location with a very different temperature and humidity than that of the previous location may result in external or internal condensation. Caution is required.

Protect the PC and V.C.I. from exposure to elements such as rain, dirt, dust, food and liquids.

Be careful when handling the PC and V.C.I. Dropping the units may result in damage.

Do not expose either unit to engine oil, gasoline, antifreeze or battery acid. Also, do not clean the PC or V.C.I. case using solutions such as thinner or benzene. Doing so may result in deterioration of the case surface.

Prior to connecting the M.U.T.-III main harness between the V.C.I. and vehicle, turn the IG switch to OFF.

- Connecting the V.C.I. harness with the IG switch ON may damage the V.C.I. programming.

Use only the power AC adapter included with the PC (or approved replacement), power cigarette plug, other probes, main harness and other cables.

- Use of unspecified parts may result in damage or malfunction due to excess voltage or insufficient contact.

The LCD display of this unit turns off when the supplied voltage is less than DC 8V. This is not an error.

The power supplied should be from 8VDC to 32VDC.

Keep all V.C.I. connectors and openings away from dirt and static electricity. Exposure to dirt and static electricity may result in malfunction and damage.

Precautions

Chapter 1 Product Overview

1-1. Precautions



Service Work Precautions

- Be sure to follow all basic service work precautions when using M.U.T.-III during vehicle inspection and service work.
- For detailed information regarding service work precautions, refer to the service instruction manual of each vehicle.



Work Precautions

- When performing vehicle inspection work at the work site with the engine running, either use an exhaust gas discharger or ventilate the area sufficiently.
- When working on a vehicle, be sure to apply the parking brake and set wheel chocks in place to prevent the car from moving.



Driving Precautions

- If you wish to use M.U.T.-III while driving the target vehicle, first verify that all parts are properly assembled.
- While driving, always have an assistant operate M.U.T.-III.
- Be sure that the M.U.T.-III main harness and other cables will not interfere with driving.
- Install and remove the PC and V.C.I. with the vehicle parked, IG switch OFF.



PC Usage Limitations



Do Not Install Software on the PC


- The M.U.T.-III PC is a special service tool. Do not install any software other than M.U.T.-III software onto the unit. Installation of other software results in the risk of M.U.T.-III system failure.
- Any unauthorized software will not be supported. Technical support for units with unauthorized software will be charged additional technical support fees to return the unit to its authorized state of operation.
- All unauthorized software will be erased with each new upgrade.



V.C.I. Outline Drawing and Component Names

1-2. V.C.I. Outline Drawing and Component Names

The names of the V.C.I. components are indicated in the figure below.

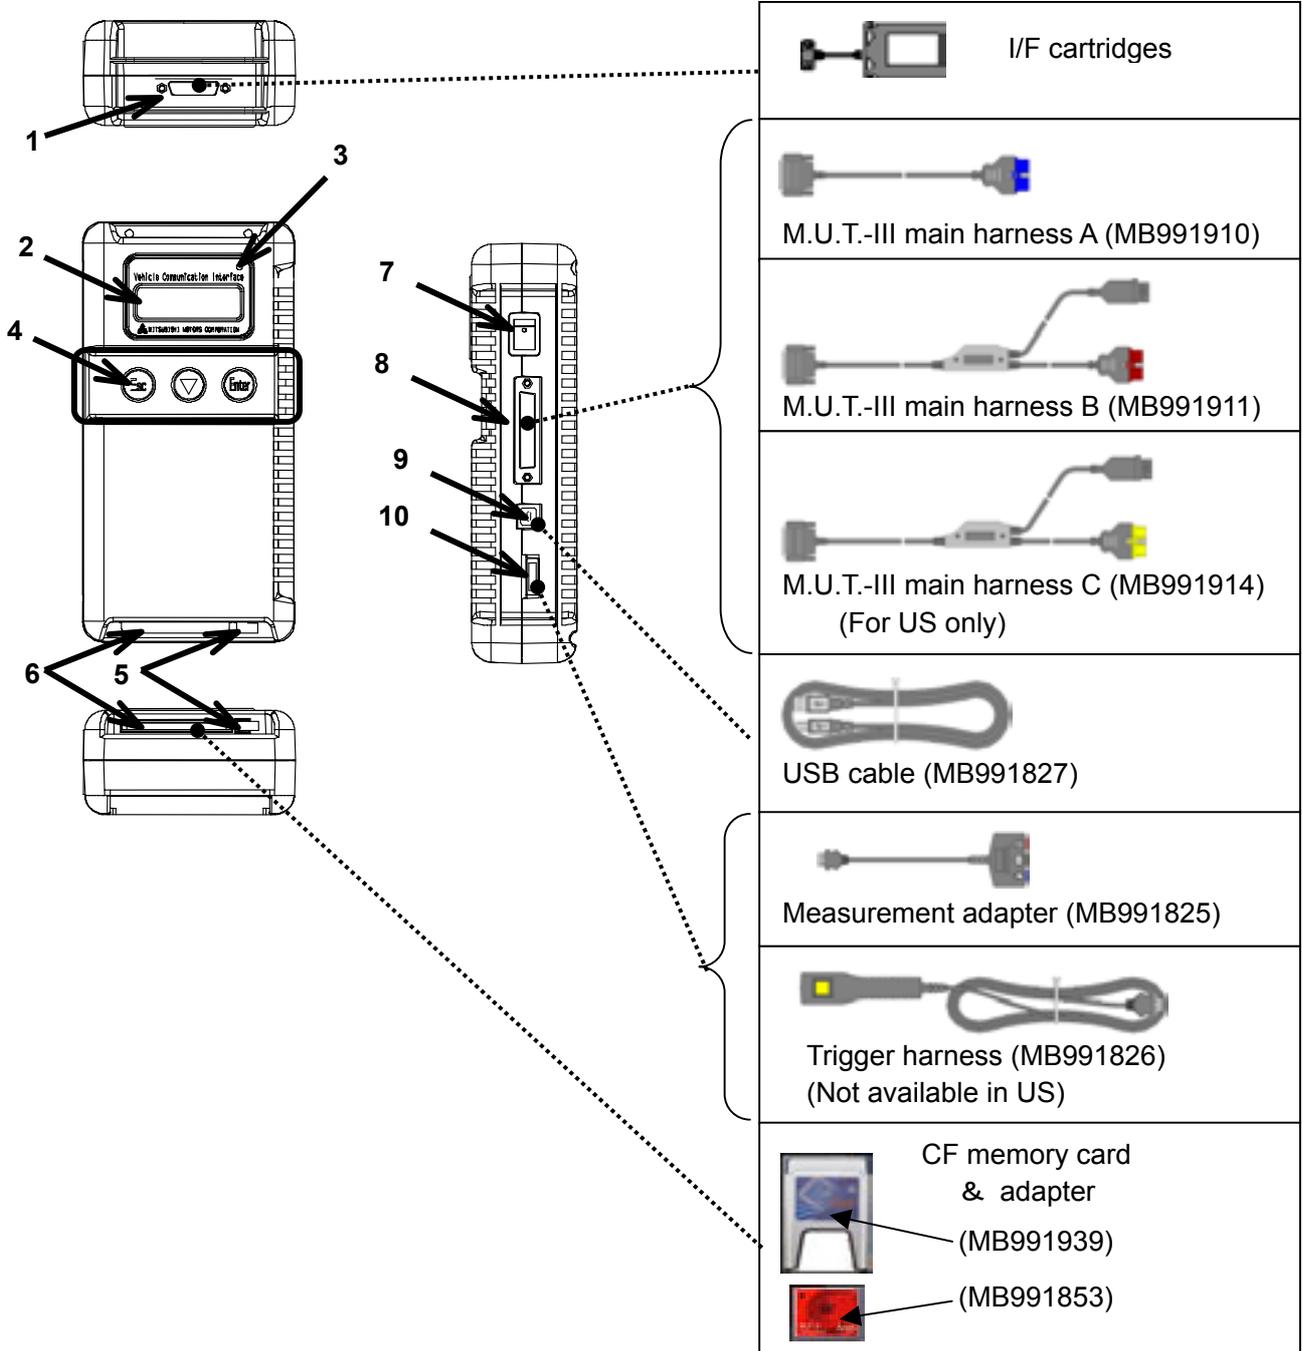

<<Component Names>>

- | | |
|---|-------------------------------|
| 1. I/F cartridge terminal | 6. Memory card insertion port |
| 2. LCD screen | 7. Power switch |
| 3. Indicator lamp | 8. Main harness terminal |
| 4. Operation button
(Used with V.C.I. functions) | 9. USB terminal |
| 5. Memory card removal lever | 10. Trigger terminal |

M.U.T.-III Components Explanations

1-3. M.U.T.-III Components Explanations



(1) **Vehicle Communication Interface (V.C.I.)** (MB991824)

A communication interface used to connect the vehicle ECUs and the PC.

1. When connected with the PC

- Vehicle diagnosis
(Interactive fault diagnosis with MEDIC-II)
- SWS communication & CAN communication support & DCC support
- Drive recorder
- ECU reprogramming
- Volt, Ohm, measurement
- Fuel pressure measurement (Not available in US)

2. When used with the V.C.I. unit (disconnected from PC)

- Drive recorder
- ECU reprogramming
- Volt, Ohm measurement
- Belt Tension measurement



(2) **Memory Card**

Stores data for ECU reprogramming, drive recorder, etc. This is a standard, off-the-shelf memory card. The one provided (with reprogramming data) is a Compact Flash memory card (MB991853) inserted into the CF card adapter (MB991939).



(3) **M.U.T.-III Main Harness A** (MB991910)

Used when connecting the V.C.I. with vehicles that have only one 16-pin data-link-connector.

- Supports fault diagnosis and ECU updating on the above-described vehicles
- Supports the CAN communication system



(4) **M.U.T.-III Main Harness B** (MB991911)

Used when connecting V.C.I. with vehicles that have a 16-pin + 12-pin or 16-pin + 13-pin data-link-connector.

-For models equipped with only 12-pin (or 12-pin + 12-pin) data-link-connector, connect the M.U.T.-II adapter harness (MB991498) to the end of this harness in the same as M.U.T.-II, and power is supplied from the cigarette lighter socket.

M.U.T.-III Components Explanations



- (5) **M.U.T.-III Main Harness C** (MB991914) (For US only)
Used when connecting the V.C.I. with vehicles that have the 420A engine and F4AC1 transaxle.



- (6) **USB Cable** (MB991827)
Used to connect the PC to the V.C.I.



- (7) **Trigger Harness** (MB991826) (Not available in US)
A harness with a trigger button used to manually insert a trigger point for data acquisition from the drive recorder function during data recording.



- (8) **Measurement Adapter** (MB991825)
An adapter used to connect the V.C.I. and measurement probe for voltmeter and ohmmeter readings.
Or used when outputting Simulated Vehicle Speed with a vehicle whose diagnosis-connector cannot receive vehicle speed signal.



- (9) **Measurement Test Leads** (MB991499)
Test leads used for voltage and / or resistance measurement.
Test leads MB991499 acquire quality replacement test leads from Radio Shack or similar electronics stores.




- (10) **I/F Cartridge**
Used to implement special functions that cannot be implemented with the V.C.I. unit alone. The following I/F cartridges used with M.U.T.-II can be used with M.U.T.-III as well:
- SWS I/F cartridge
 - Daimler-Chrysler Corporate I/F cartridge

Harness Connection Method


1-4. Harness Connection Method

Recommended harness connection sequence


- [1] Start the PC.
- [2] While the PC is starting, connect the USB cable to the V.C.I.
- [3] After the PC boots to the M.U.T.-III main screen, connect the USB cable to the PC.
 Note: Disconnect the USB cable from the V.C.I. after the PC has shut down. However, if the USB cable is disconnected during use, a warning message indicating device disconnection such as that shown in Figure 1 appears. Close the message display by pressing the **OK** button.
- [4] Select the appropriate M.U.T.-III main harness. Connect it to the V.C.I.
- [5] Connect the M.U.T.-III main harness to the vehicle data-link-connector. (See Figure 2)
 Note: Disconnect the harnesses by performing the above steps in the reverse order.
- [6] Turn the V.C.I. power switch ON and verify that the indicator lamp located in the upper right area of the LCD screen is green.
- [7] Turn the vehicle ignition switch ON, and begin the diagnostic process from the M.U.T.-III system screen.
 Note: In case the version of V.C.I. and the firmware version of V.C.I., which are mismatch, a dialog box appears on PC screen, and the V.C.I. version upgrade process begins. This upgrade typically only occurs once per M.U.T.-III system upgrade. Normal V.C.I. upgrades take about 1 minute. If a version upgrade error occurs, restart the V.C.I. by turning V.C.I. power OFF then, while pressing the Esc button, turn the V.C.I. power switch ON and begin the diagnostic process again.

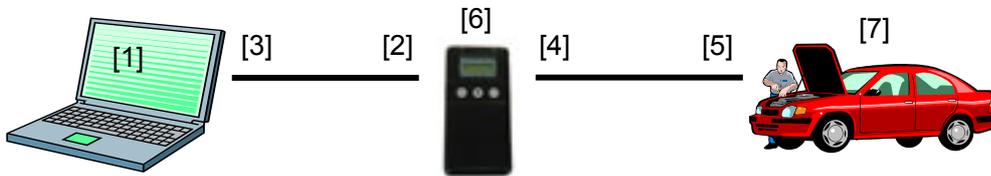

<Fig. 1>

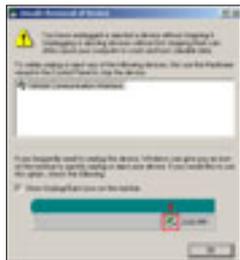

<Fig. 2>

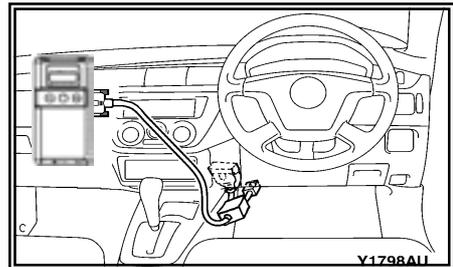


<Connecting the Trigger Harness>



Connect the trigger harness to the V.C.I. trigger terminal.
(Not available in US)

<Connecting the Measurement Adapter and Measurement Probe>

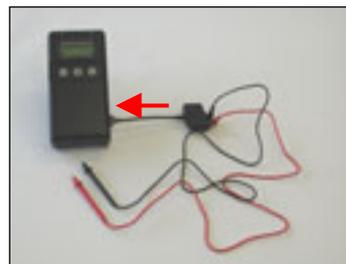

Connect the measurement adapter to the V.C.I. trigger terminal. Insert the measurement leads to the adapter. For best results, match the test lead colors with those on the adapter.

Combination Chart of Harness and Vehicle

1-5. Combination Chart of Harness and Vehicle

Use of the M.U.T.-III main harness A, B or C (US only) is determined by the type of data-link connector installed in the vehicle.


The main harness, indicated with “O”, is used in combination with another harness indicated with “●” depending on the vehicle and work to be performed. ECU update used below means ECU reprogramming.

Vehicle Data-link Connector \ Diagnostic Function		Harness Name				
		01 M.U.T.-III Main Harness A	02 M.U.T.-III Main Harness B	03 M.U.T.-III Main Harness C	04 Conventional Vehicle Inspection Adapter Harness	05 ECU Update Adapter Harness
16Pin	Fault diagnosis	O				
	ECU update	O				
16Pin&12Pin	Fault diagnosis		O			
	ECU update		O			
12Pin	Fault diagnosis		O		●	
	ECU update	-	-	-	-	-
16Pin&13Pin	Fault diagnosis		O			
	ECU update		O			●
Vehicle with 420A Engine and F4AC1 Transaxle	Fault diagnosis			O		
	ECU update	-	-	-		


Harness Name		Illustration
01	M.U.T.-III Main Harness A MB991910	
02	M.U.T.-III Main Harness B MB991911	
03	M.U.T.-III Main Harness C MB991914 (For US only)	
04	Conventional Vehicle Inspection Adapter Harness (M.U.T.-II adapter harness) MB991498	
05	ECU Update Adapter Harness MB991855	

Combination Chart of Harness and Vehicle


Vehicle data-link-connector : 16pin type

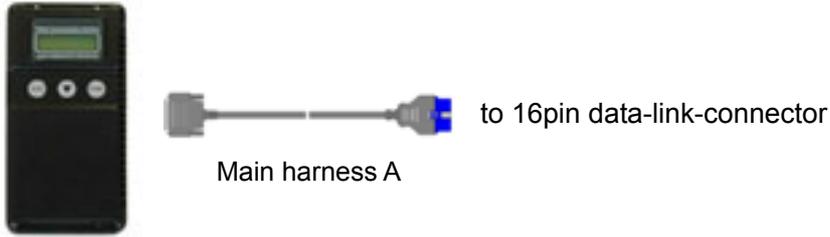


Vehicle data-link-connector : 16pin + 12 pin type

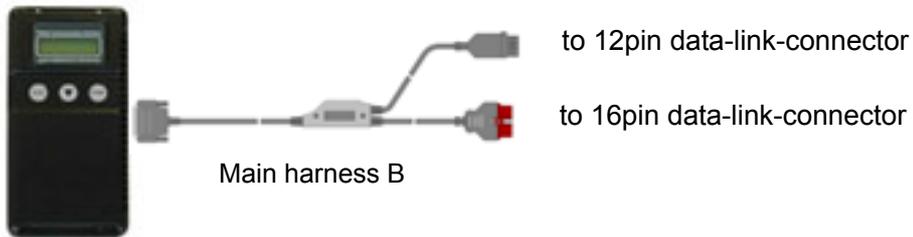

Vehicle data-link-connector : 12pin type

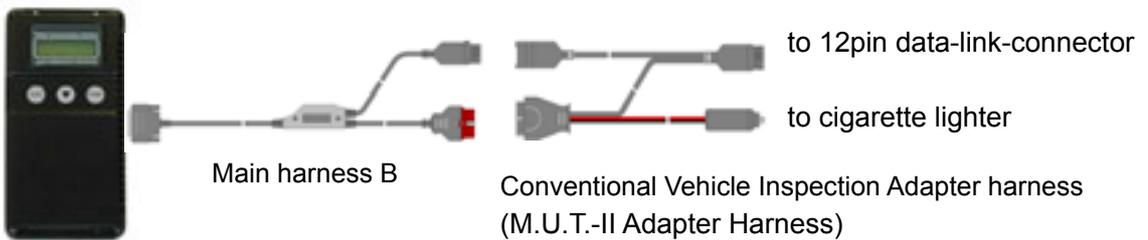

Vehicle data-link-connector : 16pin + 13 pin type

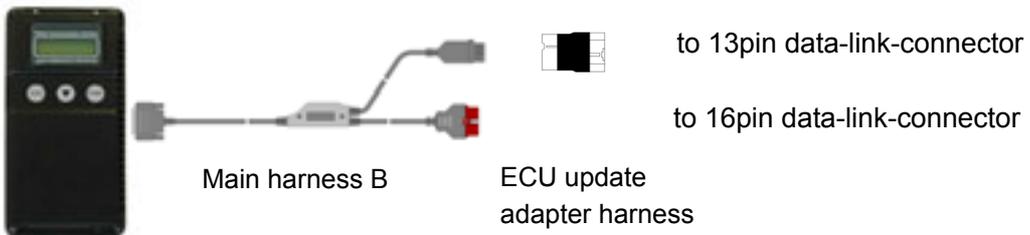

Basic Functions

Chapter 2 M.U.T.-III Functions

2-1. Basic Functions

Can be used with all vehicle installed electronic control systems (with built-in diagnostic functions) from model year 1984.

Function	Synopsis
DTC readout	Reads various diagnostic codes and displays the codes by name and number.
Data List	Reads RAM data inside ECU and displays the data in digital and graphic form. (Available with ECUs that support serial communication only)
Actuator tests	Permits forced operation or shutdown of various types of actuators that is required for service. (Available with ECUs that support serial communication only)
Simulated vehicle speed	Outputs vehicle speed signal to appropriate ECUs facilitating diagnosis without travel.
Drive Recorder	Permits recording and displaying arbitrary service data that is determined for an arbitrarily specified time.
Voltmeter	Permits measurement of DC voltage within the range of 0- ±40V using the voltage measurement function.
Ohmmeter	Permits measurement of resistance within the range of 0-100KΩ using the resistance measurement function.
SWS Diagnosis	Permits SWS diagnosis using the SWS monitor kit (MB991806).
CAN Bus Diagnosis	Identifies CAN bus failures that occur in vehicle that is subject to the diagnosis and narrows down a cause.
ECU Reprogramming	Permits updating programs in ECU for system version upgrade.
Electronic service information	Displays with Service manual data. In addition, the system supports interactive fault diagnosis. The Interactive Diagnosis permits user to use both the scan tool viewing functions and service manual troubleshooting procedures. (Not available in US and Australia)
Tension meter	Permits measurement of belt tension using Belt tension meter set (MB991668).
Fuel pressure meter	Permits measurement of fuel pressure using a pressure gauge set (MB991637 / MB991981), and displays it on PC. (Not available in US)
Fuel consumption measurement	Permits more precise measurement of fuel consumption by measuring injection quantity of fuel injector.

2-2. V.C.I. Functions

<When V.C.I. and PC are connected>

2-2-1. Fault Diagnosis



The system diagnoses faults by receiving instructions from the PC and communicating with the vehicle-installed ECU. When the system is connected to the PC, V.C.I. keys are disabled.

[Start Screen]

*When the USB cable is connected to the system, the screen illustrated on the left appears.

The screen indicates the flow of signals between the PC (P) and V.C.I. (V) using "P → V" and "P ← V".

2-2-2. Fuel Pressure measurement (Not available in US)



The system analyzes faults by measuring fuel pressure using the Pressure gauge set (MB991637 or MB991981).

{ Pressure gauge for LP: MB991655 or MB991979 }
{ for HP: MB991708 or MB992007 }

The V.C.I. reads the fuel pressure, which is converted into voltage value by the pressure gauge. Then the system converts it back to pressure value and displays it as text or graph on PC screen. (refer to 11-2-1.)

<With the V.C.I. only>

2-2-3. Measurement Function 1: Voltmeter / Ohmmeter



The system reads the voltage/resistance value from the trigger terminal and displays the value on the V.C.I. LCD screen.

1. Connect the measurement adapter to the V.C.I., connect the test leads to the adapter.
2. Connect the appropriate main harness to the V.C.I., and then to the vehicle diagnostic leak connector and turn the V.C.I. power switch ON.
3. Press  button to select Voltmeter or Ohmmeter in the Main Menu (see the illustration on the left), and press the  (Enter) button to begin measurement.

Note:

- Permits measurement of DC voltage within the range of 0-±40V.
- Permits measurement of resistance within the range of 0-100KΩ.
- Permits displaying the value as text or graph on PC screen by connecting the V.C.I. to PC. (refer to 11-2-2.)



Chapter 3 Operating M.U.T.-III

3-1. Starting and Shutting the M.U.T.-III System

3-1-1. Starting the M.U.T.-III System

[Starting up PC]




Turn on the power of M.U.T.-III PC.

For instruction on how to start up the M.U.T.-III Scan Tool Viewer (STV) system, please refer to the operation manual of the MEDC-II system.

3-1-2. Shutting Down the M.U.T.-III System

[Closing M.U.T.-III System]

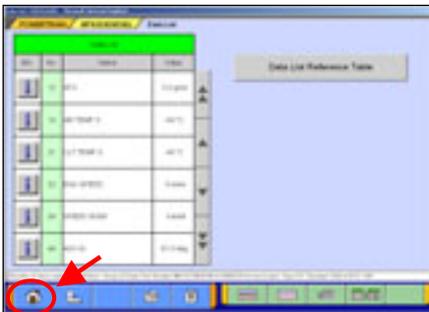

- (1) Press  button on each diagnostic screen to return to the STV Top Menu screen (see (2)).



- (2) M.U.T.-III system can be closed down by pressing  button on this screen.


Trademarks

- Microsoft®, Windows 2000® and Internet Explorer® are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.
- Adobe, the Adobe logo, Adobe Acrobat and the Adobe Acrobat logo are trademarks of Adobe Systems Incorporated.

Screen Explanations

3-2. Screen Explanations

< STV Top Menu >

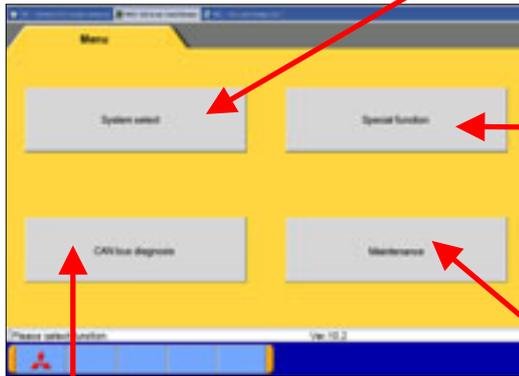


Starts the CAN bus diagnosis. Refer to Chapter 9.

To diagnose vehicles by selecting each system (ECU).
e.g.
-Reading diagnostic trouble code
-Actuator test -Drive recorder
For detailed operation procedure, refer to 3-3-1.

-To display saved data (Drive recorder, SWS monitor)
-ECU reprogramming (Chapter 10)
-Measurement Function (Chapter 11)

To set various settings e.g. environment, printer.
For detailed operation procedure, refer to 3-4.

< System Selection Screen >

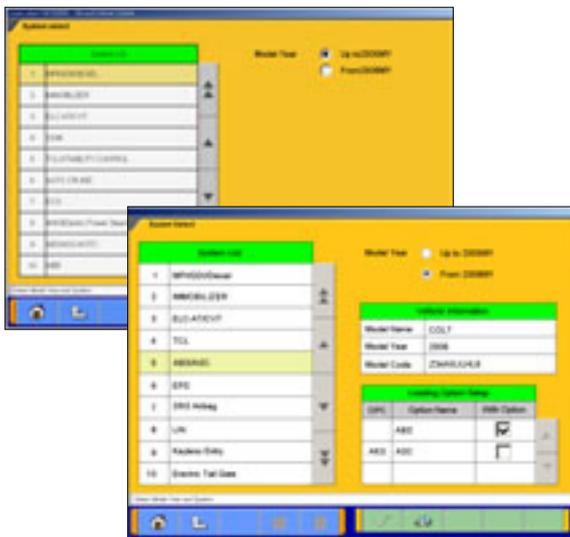


This screen is for specifying a system that you want to diagnose.

As operation procedure differs according to the vehicle's Model Year, please select "Up to 2005 MY" or "From 2006 MY" firstly. (refer to 3-3-1)


Screen Explanations

<Special Function Selection Screen>

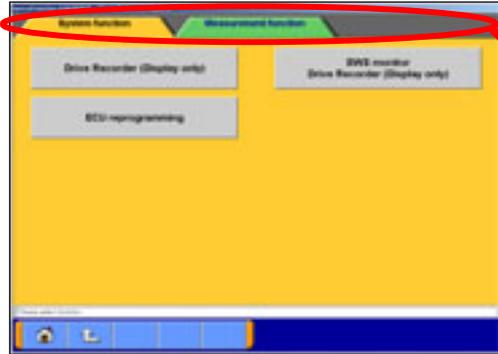

The Special Function selection screen allows you to switch between major categories by selecting the tabs located on the upper part of the screen.

<Diagnostic Screen>

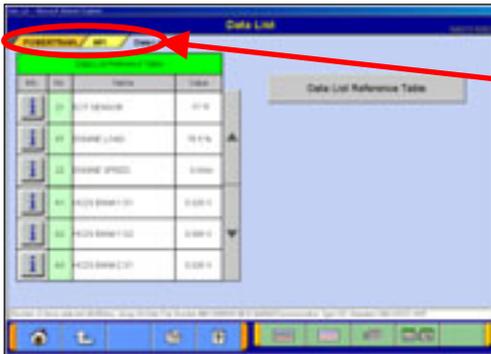

The diagnostic screen displays three titles in layer format, informing you what is being implemented on each system. The screen does not allow you to switch systems by selecting the upper title areas.

Basic Flow to Start Diagnosis


3-3. Basic Flow to Start Diagnosis

3-3-1. Basic Flow of System Select Diagnosis



(1) STV Top Menu

Press **System Select** button on the STV Top Menu screen.

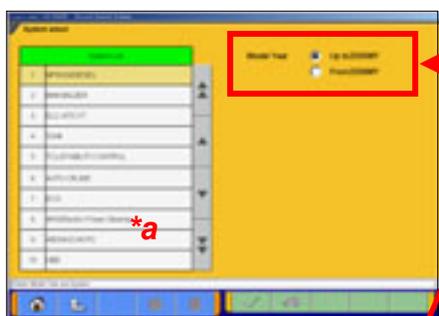


(2) System Selection Screen

Select either one of **“Up to 2005MY”** or **“From 2006MY”** for the Model Year of the vehicle you are diagnosing. Then follow the each operation below.

◇ When selecting “Up to 2005 MY”

1. Select a system on the *System List* (*a), and press .
2. If the system has a loading option, the *Loading Option Setup* list (*b) will be displayed. Then, select an item having a box checked (✓) and press .

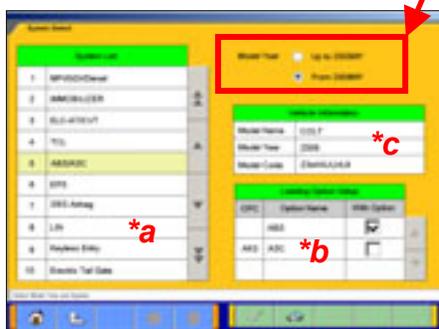

◇ When selecting “From 2006 MY”

1. Confirm the contents of the *Vehicle Information* list (*c).
-When the contents are not describing the vehicle, press  to correct the information. (For details, refer to [3-3-2](#))


-When the contents are describing the vehicle, press .
2. Select a system on the *System List* (*a), and if the *Loading Option Setup* list (*b) is displayed, select an item having a box checked (✓). Then press .

Note:

-If the engine is OBD, the check code appears.

-When you select “MFI”, “ELC-A/T” or “CRUISE CONTROL” system, a selection screen appears asking whether MITSUBISHI or DaimlerChrysler. Select a button that the engine belongs to.

Basic Flow to Start Diagnosis

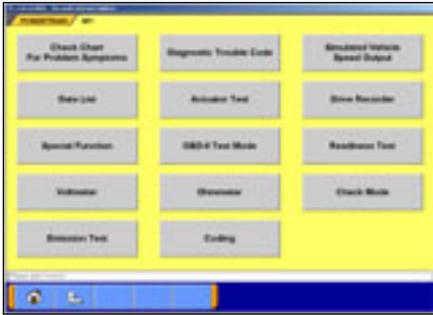

[MFI's Function Selection menu]

(3) Function Selection Screen

After System selection, the Function selection menu of the selected system appears. Select a button that you want to perform.

In the picture on the left shows the screen appears when the MFI system, which is a representative example, is selected. Details of each buttons are as follows.

Note:

As available functions differ between systems, there might be functions that will not appear when you select other system.

Check Chart For Problem Symptoms --To view the Symptom Chart of Service Manual.

Diagnostic Trouble Code --To read out or erase Diagnosis Trouble Codes from vehicle ECU.

Also, you can read out the Freeze Frame data. (refer to 4-1.)

Simulated Vehicle Speed Output --To transmit simulated vehicle speed signal into the vehicle.

Data List -- To read the RAM data inside the ECU and displays the data in digital and graphic form.
(refer to 4-2.)

Actuator Test --To control the ECU output device. (refer to 4-3.)

Drive Recorder --To record, display or analyze the ECU input / output signals which can be viewed using Data List function. (refer to Chapter 6)

Special Function --To execute special functions specific to the selected system. For detailed operation other than Chapter 5, please utilize each Online Help function.

OBD-II Test Mode --To read out "Monitoring test results" "Provisional DTC" and "ECU information", which are regarding Emission Related System, from ECU.

Readiness Test --To read out the result of Readiness Test from ECU.

Voltmeter -- To measure voltage value using M.U.T.-III. (same operation as 11-2-2)

Ohmmeter -- To measure resistance value using M.U.T.-III. (same operation as 11-2-2)

Fuel Pressure Gauge --To measure fuel pressure using a pressure gauge, and display the result on PC screen. (Not Available in US)

Check Mode --To shorten sampling time of communication by changing the communication method between M.U.T.-III and ECU. This function is available in Data List, Drive Recorder and Actuator Test.

Emission Test --To test the Evaporative Emission Control System of the vehicle.

Coding -- To write the vehicle equipment specifications into ECU. (refer to Chapter 8)

SWS monitor (appears only when selecting "SWS" system) (refer to Chapter 7)

Pulse Check (appears only when selecting "SWS" system)
--To confirm existence of the signal pulse to operate remote system on SWS communication line.

Vehicle Information Setting

3-3-2. Vehicle Information Setting

Pressing  button, on System Selection Screen or other vehicle-confirmation screen, displays the Vehicle Information Setting Screen. This screen allows you to modify the diagnosing vehicle information.



(1) Vehicle Information Setting Screen

-Currently selected information is displayed in each item's field. (Blank space means the information is not selected.)

-**VIN** is a compulsory input.

 --OK (Returns to the screen on which  was pressed)

 --Deletes whole information

 --Displays history of settings as open options.

Press an item button to modify. --to (2)




(2) The item's individual selection screen appears.

Apply appropriate information, then press  to return to the Vehicle Information Setting screen (1).

Option Settings

3-4. Option Settings

3-4-1. Edit Option Settings

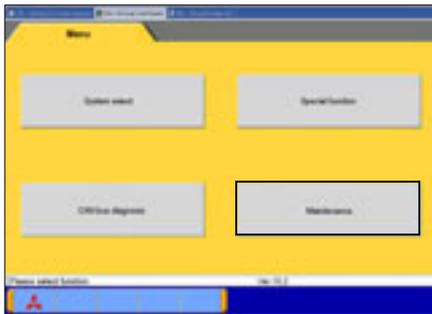

- (1) Press **Maintenance** button on the STV Top Menu screen.



- (2) Select a button corresponding to your purpose.

[Environment]

Change Environmental setting--To set the driver, which the Service manual data should be installed.

Show environmental setting--To view the settings.

Unit set--To select US unit or metric unit, e.g. lbs : kg


Printer set--To set output conditions of the printer. (3-4-2.)

Keyboard set--To select row of keys: Alphabetical-order or QWERTY.

Select Language for display--To select a language displayed in whole M.U.T.-III system.

[Data Update]

System Information--To view versions of installed software on the PC.

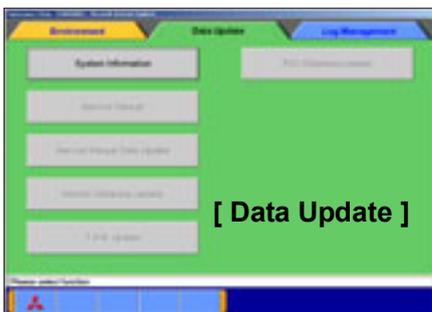


3-4-2. Set up Output conditions of Printer


- (1) When pressing the **Printer set** button on 3-4-1(2), the "Printer" window illustrated on the left appears. Select an appropriate printer icon and right-click it to open a pull-down menu; select "Printing Preferences...".

<Note>

-Set up conditions on this window will not be reflected.

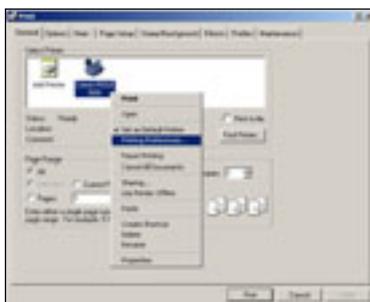


- (2) The "Printing Preferences" window of the selected printer appears. Please set output conditions e.g. page setup, and press **OK** button.

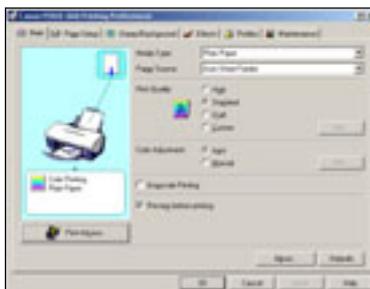

Useful Functions

3-5. Useful Functions

3-5-1. Online Help Function

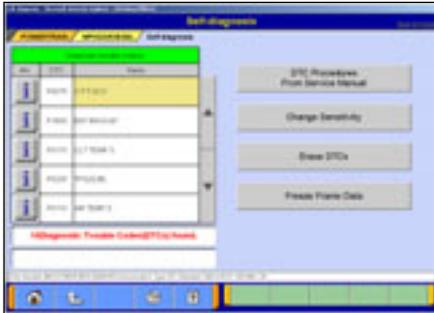

- (1) The  button on each screen is the online help button for that screen.




- (2) The online help function allows you to view a general overview of each screen and refer to explanations of the various button functions. If you wish to move the screen up or down, select the applicable scroll button located on the right side of the screen.

Chapter 4 Diagnosis Function

4-1. Diagnostic Trouble Code

4-1-1. Reading and Erasing Diagnostic Trouble Code (DTC)

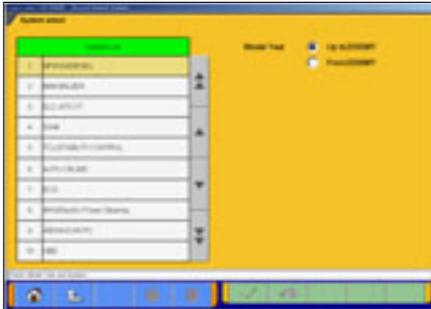


- (1) Select a system that you want to diagnose on the System Selection screen. (For instruction on how to select a system, refer to [3-3-1](#))

- In the explanation that follows, the method is explained using the MFI system as a representative example.


Note:

If the engine is OBD, a check code appears.

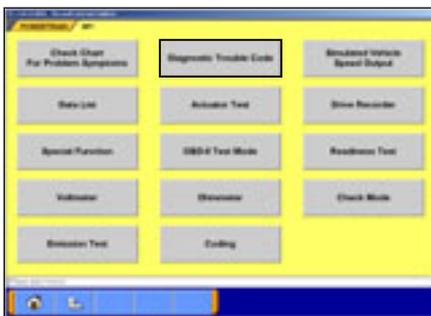

- (2) Press **Diagnostic Trouble Code** button.

The system automatically communicates with the vehicle ECU and obtains the diagnostic trouble codes (DTCs).

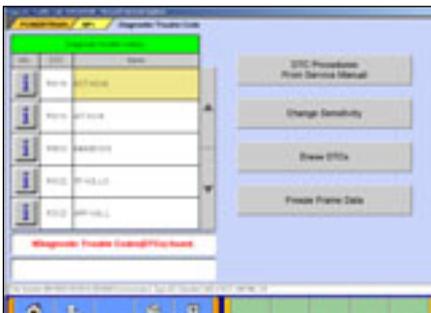

- (3) Diagnostic trouble codes (DTCs), which is currently stored in the vehicle ECU, are listed.

DTC Procedures From Service Manual

--Switches the mode to interactive fault diagnosis mode.

(Not Available in US, Australia)

Change Sensitivity

--Allows you to increase the

diagnostic code detection capability of the ECU or return the sensitivity level back to normal.

Erase DTCs

--Deletes the diagnostic trouble codes.

Freeze Frame Data

--Displays the Freeze frame data.


Data List

4-2. Data List (Service Data monitor)

4-2-1. Display of Data List

(1) Displaying Text style

Press **Data List** button on the screen 4-1-1(2), and the left screen will be displayed.

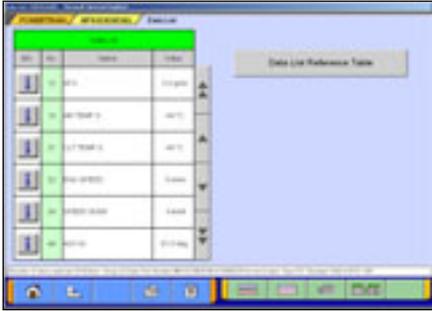


-  -- Select item -- to 4-2-2(1).
-  -- 4items/4Graphs display -- to (2)
-  -- 4items/View Graph (overwrite) --to (3)

Data List Reference Table -- Displays “Data List Reference Table” of Service Manual to view normal value.

(Not available in US and Australia)

(2) Displaying Graphs 1

The graph screen displays the data of 4items/4graphs.

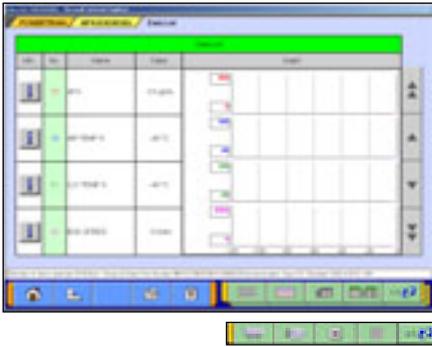


-  -- 4items/4Graphs display
-  -- 4items/View Graph (overwrite)
-  -- View Text
-  -- View1/2
-  -- Change Time Scale
-  -- Change Data Scale
-  -- Pause -- to 4-2-2(2)
-  -- Start
-  -- View2/2

Note:

Record Data ( button allows you to save the portion of Data List displayed on the graph)-- Refer to 4-2-2(2)

(3) Displaying Graphs 2

The data of displayed items are overlaid on a graph. Available function buttons are the same as Graph 1.

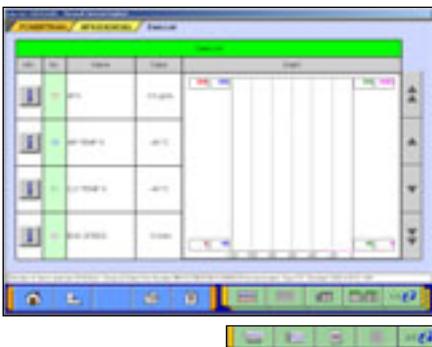


Data List

4-2-2. Details of Data List Screen



(1) Displaying Item Selection

Select a group of the data to be displayed, and press button.

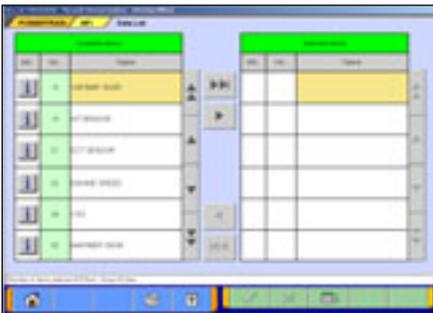

Item Select

By default, none of the items are selected.

Select an item that you wish to display, and apply the selection using or buttons.

When the selection has completed, press button.

- Inserts all the items from "Available item list" into the selection areas of "Selected item list."
- Inserts the item selected in "Available item list" into the selection area of "Selected item list".
- Inserts the item selected in "Selected item list" into the lowermost area of "Available item list".
- Inserts all the items from "Selected item list" into the lowermost areas of "Available item list."
- Changes the order in which the items are displayed in the "Selected item list" and the "Available item list," in the sequence of default setting.

Note:

- When there is no selected item, all items are displayed.
- The item number of service data OBD basic items appears green.



(2) Record Data

1. Graph data is paused by pressing button, and the data can be saved on the PC automatically.

-- OK -- to 2

--Cancel (not save the data and return to the pause screen. Pressing button starts data list again.)

2. The data has saved.


The file name of the recorded data is set as "SD + YearMonthDay + Time (military time including seconds)", using the PC time as standard.

-- OK

Note:

For details on how to view the saved data, refer to 6-2-2(3).

Data List

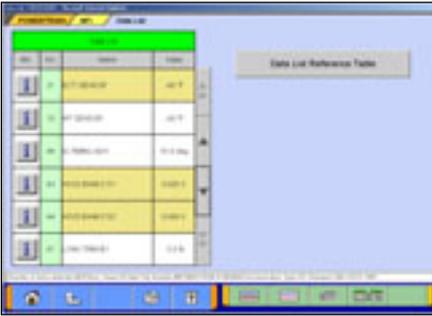

(3) Changing Item Display Order


-On the data list display screen, you can change the display order of the items. The change is possible for both text display and graph display.

-The display order change can be performed with the data list displayed continuously. (The graph display is reset.)

-Selecting the name display area of an item fixes the item. Then over-scrolling only the items not selected using the vertical scroll keys changes the order.

-The selection can be released by selecting the item again.

-The function is not activated while a data range display area is selected. (Selection, release, and scroll functions of item are not available.)

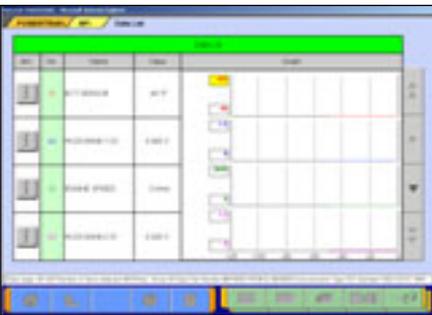

(4) Data Range Change

-Select a data range display area on the graph.

-When the color of the selected area turns into yellow, you can enter values.

-Entering method: Use PC keyboard or scroll keys.

-When use PC keyboard, enter a value, and then press the [Enter] key or release the selection of the data range display area to determine the data range change.

-When the scroll keys,  and , on the screen are used for the data range change, pressing the  key each time changes the data range setting by +5 % of full scale and the  key changes it by -5 %. The change is determined at each key pressing.


Actuator Test

4-3. Actuator Test

Press **Actuator Test** button on the screen 4-1-1.(2), then go to 4-3-1 or 4-3-2 to proceed, according to the type of the screen, A or B.


4-3-1. Actuator Test (Type A)

If the screen illustrated on the left appears....

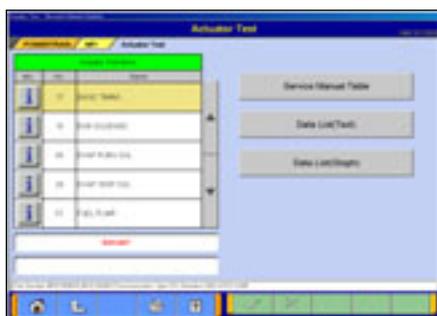

- (1) Select a test item and press button to activate actuator.

- Displays "Actuator test Reference Table" of Service Manual. (Not Available in US, Australia)
- Data List simultaneous display (Text)
- Data List simultaneous display (Graphs)

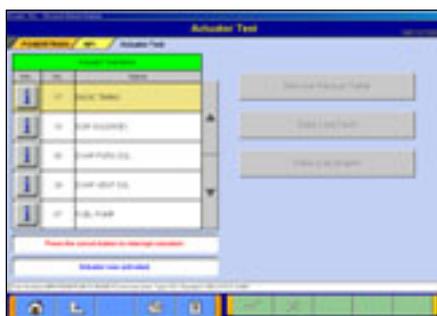

- (2) Actuator Test Executing

If you want to interrupt Actuator Test, press button.

When completes the test, a dialog box appears.


Press button. → returns to screen (1).



- Data List simultaneous display (Text)

Refer to (1)(2).

- Select items for Data list display
(For details how to select items, refer to 4-2-2 (1).)

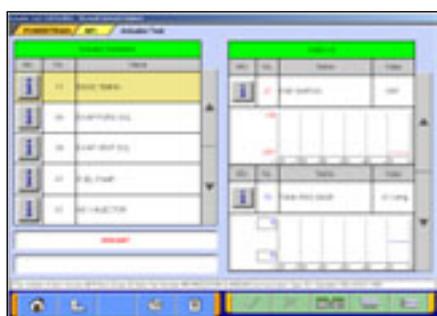

- Data List simultaneous display (Graphs)


Refer to (1)(2).

- Select items for Data list display
(For details how to select items, refer to 4-2-2 (1).)
- Change Time Scale
- Change Data Scale

Actuator Test

4-3-2. Actuator Test (Type B)

If the screen illustrated on (2) or (3) appears....

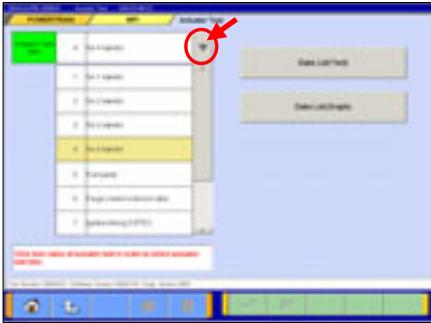



- (1) Press  button located next to item name, and select a test item from the pull-down menu.

-When the selected item has no parameters -- to (2)

-When the selected item has parameters -- to (3)


 --Data List simultaneous display (Text)

 --Data List simultaneous display (Graphs)

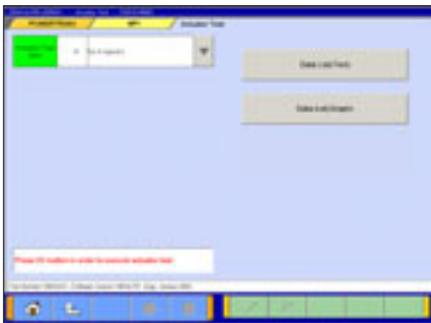

- (2) Press  button to execute Actuator Test. -- to (4)

In case selected item has no parameter

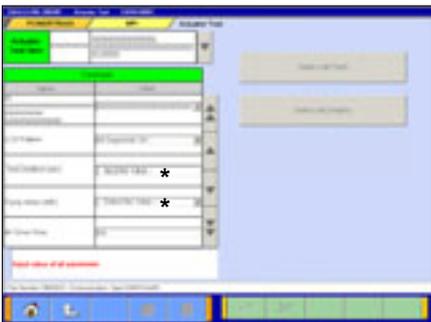


- (3) The test item that you have selected need to be set some parameters. After completes the parameter setting, press  button to execute the Actuator Test. -- to (4)

* "--Select the Value--" : Select the value from the pull-down.


* "--Input the Value--" : Input the value using hexadecimal keys appeared by clicking the input box.

In case selected item has parameters

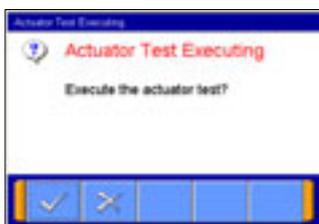

- (4) Confirmation dialog box appears.
Press  button

Actuator Test

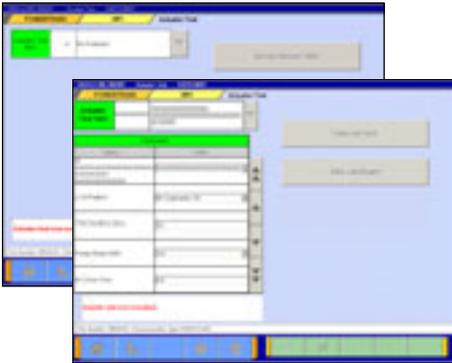

(5) Actuator Test Executing

If you want to interrupt the Actuator Test, press  button.

When completes the test, a dialog box appears.


Press  button. → returns to screen (2) or (3).



■ Data List simultaneous display (Text)

Refer to (1)-(5).

 --Select items for Data list display

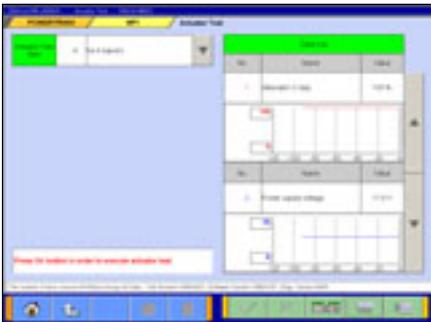

■ Data List simultaneous display (Graphs)

Refer to (1)-(5).

 --Select items for Data list display

 --Change Time Scale

 --Change Data Scale

Chapter 5 Special Function (Calibration & Setting)

5-1. ECU Information

5-1-1. Displays ECU Information (*KWP2000 on CAN only*)

- (1) Function Select

Select a system on the System Selection screen.


(For instruction on how to select a system, refer to [3-3-1](#))

Then press **Special Function** button on Function selection menu of the selected system.




- (2) Special Function menu Select

Press **ECU Information** button.

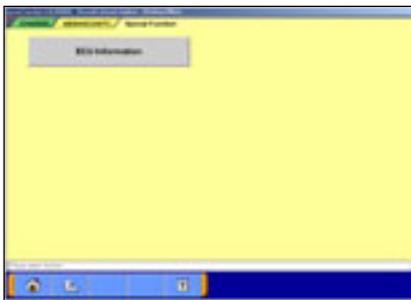

- (3) The table of ECU Information appears.

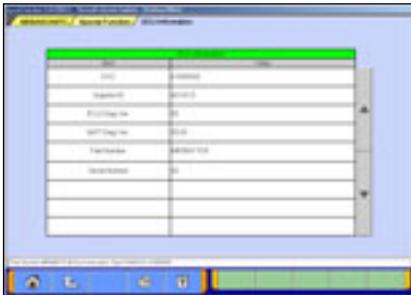

5-2. Learned Value Reset


5-2-1. Learned value reset

- (1) Special Function menu Select

Press **Learned value reset** button.




- (2) Select a reset item, and press  button.

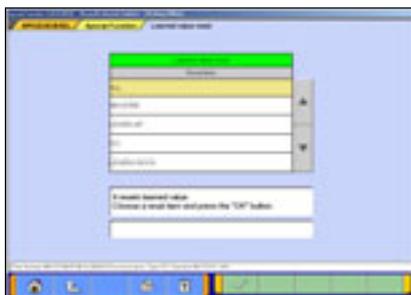

5-3. Seat Weight Sensor Accuracy Check

5-3-1. Seat Weight Sensor Accuracy Check

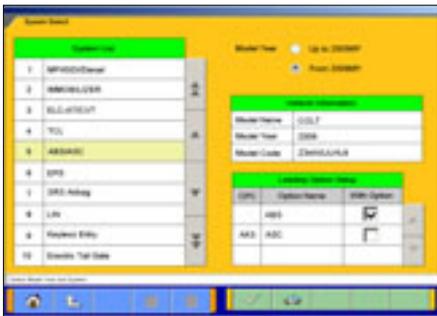


- (1) Function Select

Select “**SRS-AIR BAG**” system on the System Selection screen.(For instruction on how to select a system, refer to [3-3-1](#))




- (2) Function Select

Press the **Special Function** button.

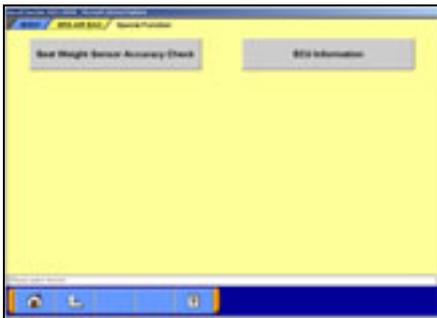

- (3) Function Select

Press the **Seat Weight Sensor Accuracy Check** button

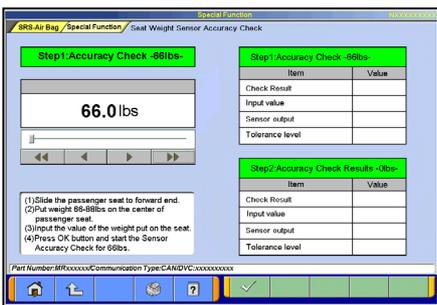


- (4) Step1: Accuracy Check –66lbs-

Slide the passenger seat to forward end.
Put 66-88lbs weight on the center of the seat.
Input the value of the weight put on the seat.
Press button and start the Sensor Accuracy Check.

--unit: 1lbs
 --unit: 0.1lbs

Note:

When a result is NG, 5-3-2. is displayed.

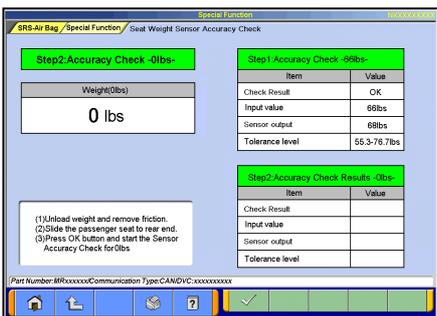


- (5) Step2: Accuracy Check –0lbs-

Unload weight and remove friction.
Slide the passenger seat to rear end.
Press the button and start the Sensor Accuracy Check.

Note:


When a result is NG, 5-3-2. is displayed.

Special Function <Seat Weight Sensor Accuracy Check>

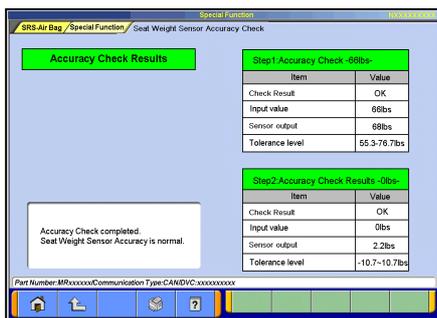


- (6) Accuracy Check Results
After the Accuracy Check completed normally, the results of each test is displayed.

5-3-2. Zero-Calibration

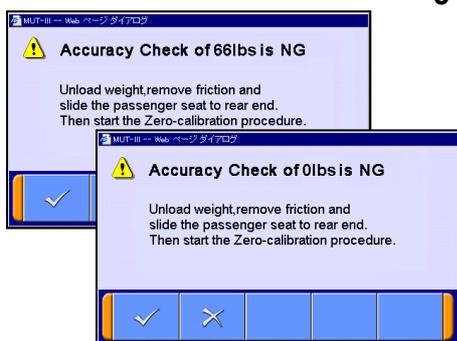


- (1) When the Accuracy Check is NG, the message illustrated on the left will be displayed. Start the procedure for Zero-calibration in order to retry the Weight Sensor Accuracy check

- OK -- to (2)
- Cancel -- back to 5-3-1.(4) / (5)

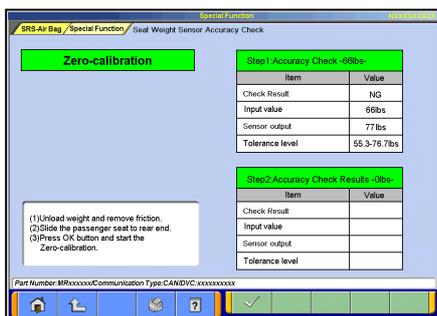


(In the case 66lbs check is NG)

- (2) Zero-calibration
Unload weight and remove friction.
Slide the passenger seat to rear end.
Press button and start the Zero-calibration.

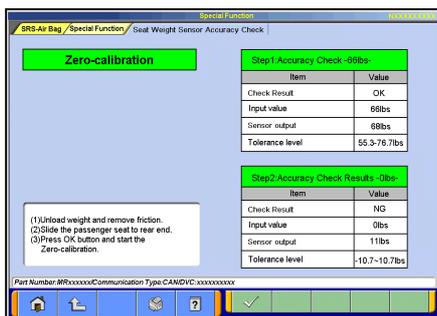

(In the case 0lbs check is NG)

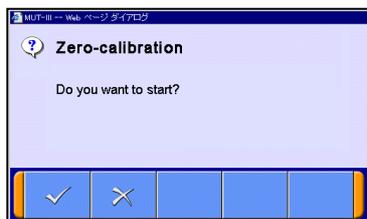

- (3) Zero-calibration Start Confirmation

- Start
- Cancel --back to (2)

Note:

After the Zero-calibration completed, please retry the Weight Sensor Accuracy check (5-3-1(4)).

Special Function <Steering Angle Sensor Calibration>

5-4. Steering Angle Sensor Calibration

5-4-1. Steering Angle Sensor Calibration


- (1) System Select

Select “**Steering Angle Sensor**” on the System Selection screen. (For instruction on how to select a system, refer to [3-3-1](#))




- (2) Function Select

Press **Special Function** button.

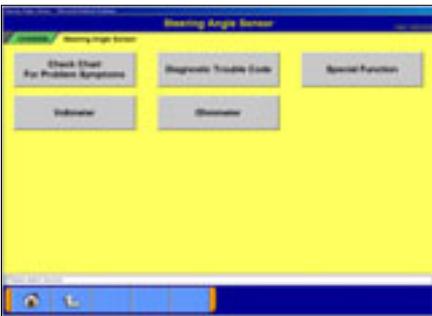

- (3) Special Function menu Select

Press **Steering Angle Sensor Calibration** button.

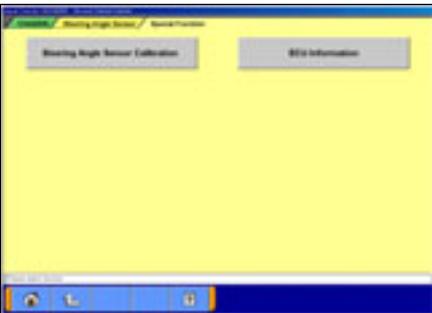


- (4) Steering Angle Sensor Calibration

Select a command item and press the  button to execute.

Note:

When the display is “Yet” as the result of status, it is to (5).

When the display is “Done” as the result of status, it is to (7).

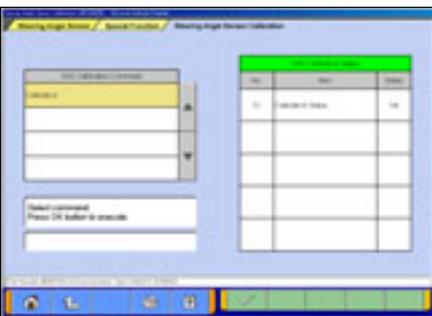


- (5) Study Confirmation

 --Start --to (6).

 --Cancel --to (4).

Note:


Please execute after making a tire and a steering wheel straight.

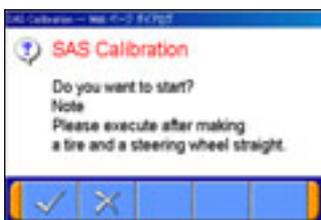


Special Function <Steering Angle Sensor Calibration>




- (6) Study Completed
 --OK --to (4).

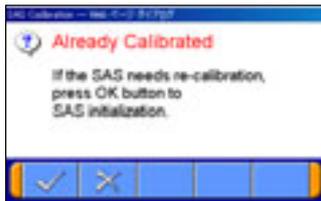

- (7) Re-calibration
 If the SAS needs re-calibration, press the button to execute SAS initialization.
 --Cancel --to (4).

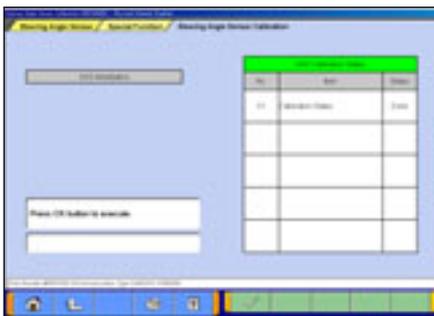


- (8) Initialization
 Press the button to execute.

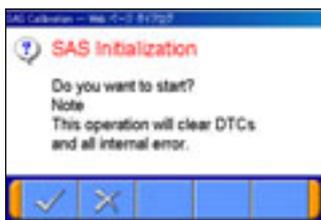

- (9) Clear DTCs Confirmation
 --Start --to (10).
 --Cancel --to (8).

Note:

This operation will clear DTCs and all internal error.

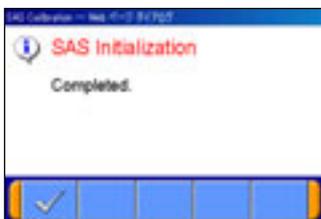


- (10) Clear Completed
 --OK --to (4).

5-5. Lateral G sensor Calibration

5-5-1. Lateral G sensor Calibration

(1) System Select

Select “**ABS/ASC/ASTC**” on the System Selection screen.
(For instruction on how to select a system, refer to [3-3-1](#))

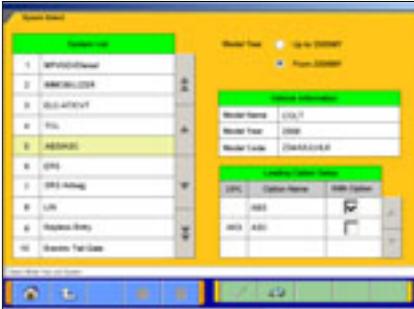


(2) Function Select

Press **Special Function** button.




(3) Special Function menu Select

Press **Sensor Calibration** button.

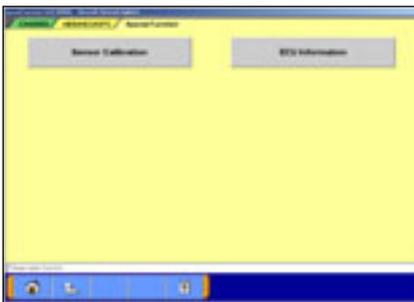

(4) Execute Screen

Press the button to execute.

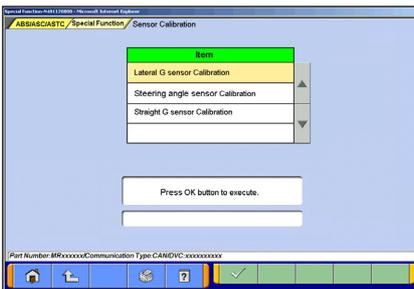


(5) Execute Confirmation

- Start
- Cancel --to (4).




(6) Lateral G sensor Calibration Completed

- returns to (4).

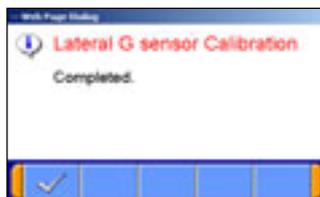

5-6. TPMS ID Registration and Checking

5-6-1. TPMS Special Function

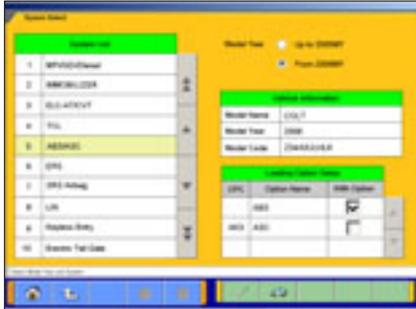

- (1) System Select
Select "TPMS" on the System Selection screen.
(For instruction on how to select a system, refer to [3-3-1](#))




- (2) Function Select
Press the **Special Function** button.




- (3) Function Select
The Pressure Sensor ID Registration button -- to 5-6-2.
The Pressure Sensor ID Check button -- to 5-6-3.
The Pressure Sensor Check button -- to 5-6-4.

5-6-2. Tire Pressure Sensor ID Registration

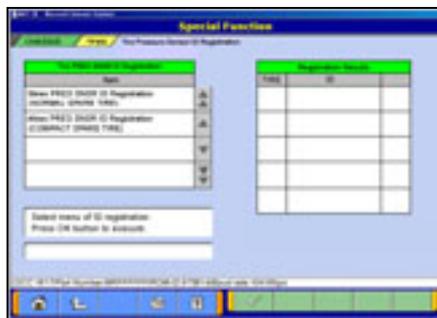

- (1) Select item from the Tire PRES SNSR ID Registration menu, and press button to execute.

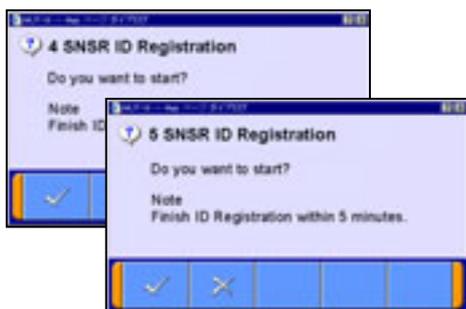

- (2) Registration Execution Confirmation
 --Start
 --Cancel -- to (1)
Note:
Finish ID Registration within 5 minutes.

Special Function <TPMS ID Registration and Check>



(3) Registration Execution

If you want to interrupt the ID Registration, press the button. -- to (4)

When the registration complete, Registration Result will be displayed. Press button. -- to (5)



(4) Registration Cancel Confirmation

-- OK -- back to (1)

-- NO -- back to (3)



(5) ID Registration completed.

--OK

5-6-3. Tire Pressure Sensor ID Check


The registered Tire Pressure Sensor ID is displayed.



Special Function <TPMS ID Registration and Check>

5-6-4. Tire Pressure Sensor Check

- (1) Press the  button to execute.

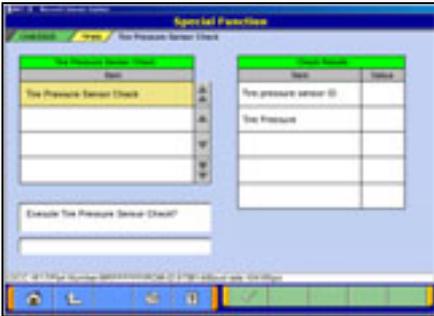

- (2) Tire Pressure Sensor Check execution Confirmation


-  --Start
-  --Cancel



- (3) Tire Pressure Sensor Check Executing

If you want to interrupt the Sensor Checking, press the  button. -- to (4)

When the check completed, the result will be displayed. Press the  button. -- to (5)

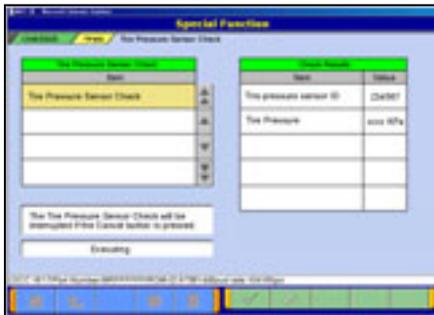

- (4) Tire Pressure Sensor Check Cancel Confirmation

-  -- OK -- back to (1)
-  -- NO -- back to (3)



- (5) Tire Pressure Sensor Check completed

-  --OK --to (1)



Chapter 6 Drive Recorder


6-1. How to Record the Data

There are two ways for recording the data, “Recording by V.C.I.alone (6-1-1)”, and “Recording on PC with displaying data (6-1-2)”. Please select one of them and follow the procedure.

6-1-1. Recording by V.C.I. alone

This section describes the operation for recording data using only V.C.I. without connecting to PC. However, drive recorder settings such as items to be recorded or trigger method are configured using PC.

Please connect V.C.I. into PC and the vehicle, and start performing the following steps using PC first.

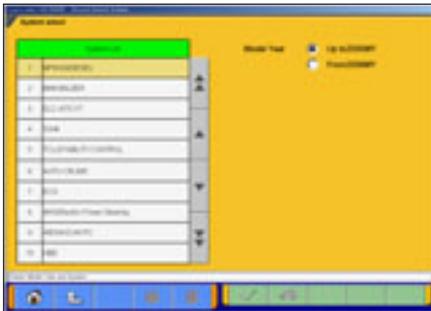


(1) System Select

Select a system for which the drive recorder is to be used on the System Selection screen.

(For instruction on how to select a system, refer to [3-3-1](#))

- The following explanation describes how to set the drive recorder settings of the MFI system as a representative example.

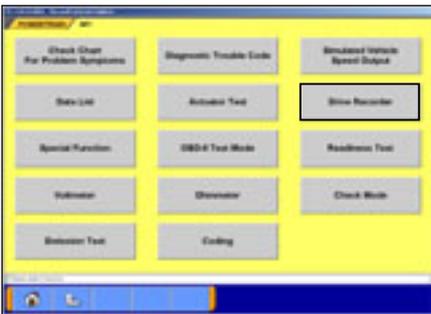

(2) Function Select

Press **Drive Recorder** button.



(3) Drive Recorder Function select

Press **Record** button on the Drive Recorder function menu.

Note:


Data display-- To transfer the recorded data on the V.C.I. into the PC (Refer to 6-2), or display the data (Refer to 6-3).

Record (Read Setting Conditions)

--Restore past recording conditions so that you can execute recording under the same conditions as those used with previously recorded data files. (Refer to 6-1-3)

Data Storing -- The data saved in a removable disk can be stored into the PC. (Refer to 6-2-2(7))

Drive Recorder <Record by V.C.I. alone>

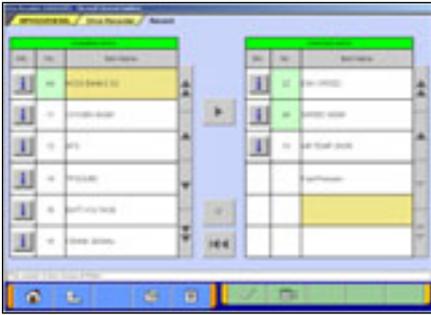

(4) Item Select


- Select an item you wish to record and apply the selection using  button.

-  --Inserts the item selected in “Available items list” into the selected area of “Selected items list”.
-  --Inserts the item selected in “Selected items list” into the lowermost area of “Available items list”.
-  --Inserts all the items from “Selected items list” into the lowermost areas of “Available item list”.
-  --Changes the order in which the items are displayed in “Selected items list” and “Available items list”, in the sequence of default setting.

- When complete the selection, press  button.

Note:

-A maximum of 16 items can be recorded.

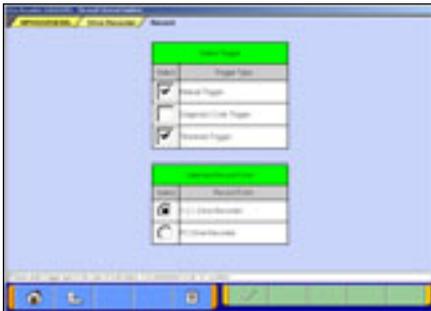

(5) Trigger method / Recording style Select

- Select trigger method and put mark(s). (Multiple selection)
- Put the mark on “**V.C.I. Drive recorder**”.
- When complete the selection, press  button.

“**Manual Trigger**” --Allows you to set the trigger manually.
--to (8)

“**Diagnosis Code Trigger**” --Applies the trigger when the specified diagnostic code is generated. -- to (6)

“**Threshold Trigger**”--Applies the trigger when the condition meets the set threshold. – to (7)




(6) When “**Diagnosis Code Trigger**” is selected in (5), the left screen appears.

Select an item to be the trigger, and press  button.

--to (8). (If Threshold Trigger is selected as well, go to (7))

Drive Recorder <Record by V.C.I. alone>

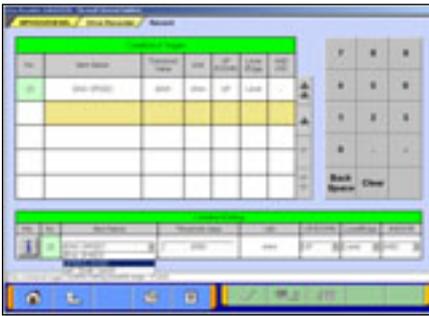

(7) When “**Threshold Trigger**” is selected in (5), the left screen appears.

- Select an item and edit conditions in *Condition Editing* table appearing at the bottom of the screen, first.


Condition Editing table

“UP/DOWN”: Threshold or higher / Threshold or lower

“Level/Edge”: Matching data / Data as of the time when it turns to be matching from not matching

“AND/OR”:-Data matching with both of this condition and the other one upper row on *Condition of Trigger* table /
-Data matching with either of this condition or the other one upper row on *Condition of Trigger* table

- Then, press  button to set the condition into selected area of *Condition of Trigger* table.
(*Condition of Trigger* table can include up to 8 conditions.)
- When complete the setting, press  button.

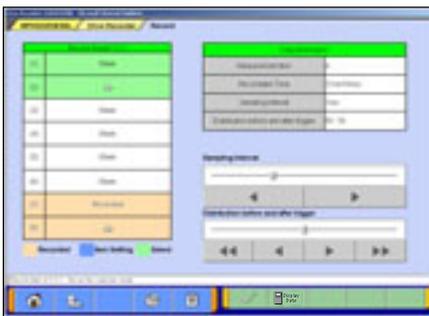

(8) Select the V.C.I. recording area on the left list.
Set the sampling interval and rate distributions (before and after trigger) by moving the cursor or by pressing  button.


 --OK --to (10)

 --Display of V.C.I. data --to (9)

Note:

- You can select from eight recording areas.
- It is possible to set consecutive areas as well.
- The sampling interval time indicates the data-recording interval for one item. A setting of 0 seconds results in the fastest sampling interval.
- When a sampling interval other than the fastest interval is selected, the amount of time in which recording is possible appears. This time is a calculated estimated time and may differ from the actual amount.

Drive Recorder <Record by V.C.I. alone>

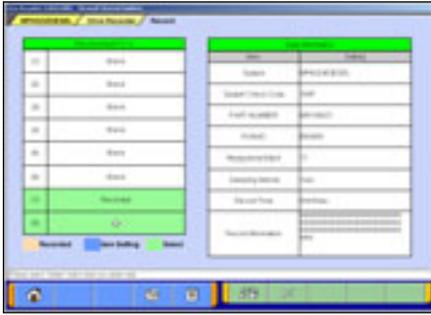

(9) View V.C.I. Regeneration Data

1. For the data recorded in the selected V.C.I. recording area, the settings of the items are displayed.




-- Deletes data recorded in the V.C.I.

Select a data you wish to delete, and press this button -- to 2



-- Cancel -- to (8)

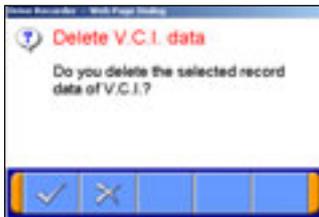

2. Delete Confirmation



--OK



--Cancel



(10) Enter the record information (memo)


Enter the reference information, such as the vehicle model and diagnosed system name.



--OK -- to (11)

Note:

-As the unit is linked with the PC keyboard, you can enter the information either using the PC keyboard or by using the screen keyboard.

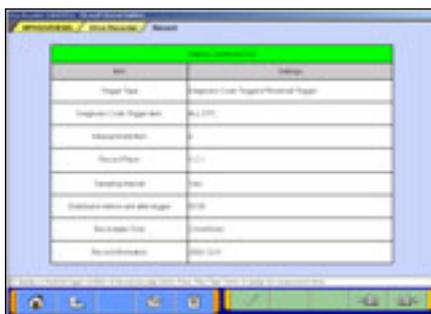

(11) The contents check of setting (1/3)

The list of recording settings appears.



--To check set items



--To check threshold trigger conditions (if selected)

Press button transmits the settings to the V.C.I.-- To (14)



(12) The contents check of setting (2/3)

The list of recording items appears.




--To check threshold trigger conditions (if selected)



--To check recording setting

Press button transmits the settings to the V.C.I.-- To (14)


Drive Recorder <Record by V.C.I. alone>

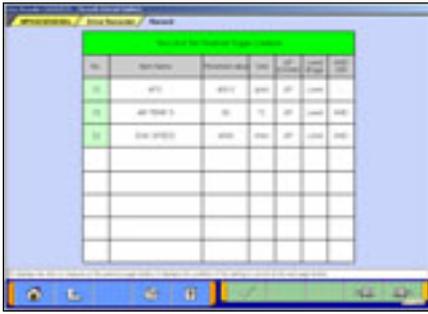

- (13) The contents check of setting (3/3) (Only if selected in (7))
The list of Threshold conditions appears.

--To check recording setting
 --To check set items

Press button transmits the settings to the V.C.I.-- To (14)

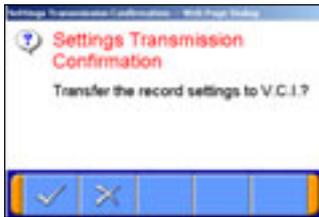


- (14) Transmit Confirmation

By pressing button on screen (11)/(12)/(13), the record settings are transmitted to V.C.I..

Press button.



- (15) Once the settings have been transmitted from the PC to the V.C.I., a message appears indicating that the settings have been transmitted. Please wait a second.

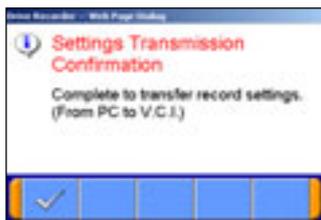

- (16) Press button.

Note:

If you wish to start recording immediately, disconnect the USB cable while leaving the V.C.I. switch ON.

(Disconnecting the USB cable starts to record the data on V.C.I.) -- to (17)

If you wish to just set the settings and later start recording, turn the V.C.I. switch OFF and then disconnect the USB cable.



- (17) Recording

When you record with a manual trigger, connect the trigger harness to the V.C.I. trigger terminal as necessary.

Note:

-When the USB cable is connected, the V.C.I. communicates with the PC, thereby prohibiting drive recorder startup. Do not connect the USB cable.

Drive Recorder <Record by V.C.I. alone>



(18) Starting Recording

To start recording, turn off the engine first, and then turn the ignition switch ON or start the engine and turn the V.C.I. power switch ON. Recording begins after communication initialization.

Note:

-The number in parenthesis on the V.C.I. LCD screen indicates the recording area of the V.C.I. drive recorder.



(19) Trigger

-With a manual trigger, pressing the V.C.I. Enter key activates the trigger, displaying "T" on the screen. Once the trigger has been activated, the data after the time of the trigger are recorded.

Note:

-With a diagnostic trigger, the trigger is automatically activated when the specified diagnostic code is generated.

-With a threshold trigger, the trigger is automatically activated when the specified conditions are met.



(20) Ending Recording


If you wish to end recording, regardless of whether or not the trigger has already been generated, press the V.C.I. ESC key.

Once the button has been pressed you can disconnect the vehicle harness and trigger harness.

(21) When you check the data recorded in V.C.I., **continue to 6-2-1.**

6-1-2. Recording on PC with displaying data

This section describes the operation for saving the data at a file with displaying it as the set up record conditions on PC.

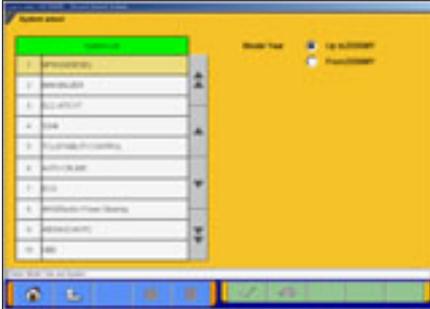


(1) System Select

Select a system for which the drive recorder is to be used on the System Selection screen.


(For instruction on how to select a system, refer to [3-3-1](#))

- The following explanation describes how to set the drive recorder settings of the MFI system as a representative example.

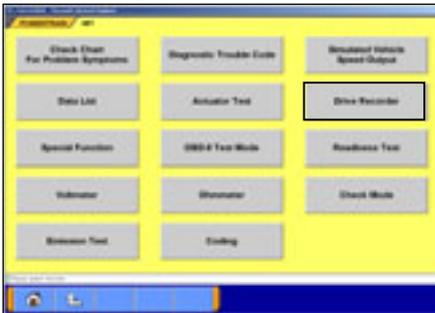

(2) Selection of function.

Press **Drive Recorder** button.

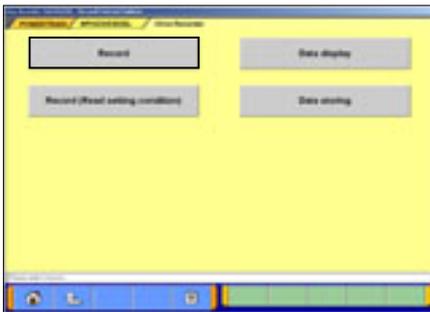

(3) Press **Record** button on the Drive Recorder function menu.


Note:

Data display -- Displays the recorded data. (Refer to 6-3) or edit the data (Refer to 6-2-2)

Record (Read Setting Conditions) -- Allows you to restore past recording conditions so that you can execute recording under the same conditions as those used with previously recorded data files. (Refer to 6-1-3)

Data Storing -- The data saved in a removable disk can be stored into the PC. (Refer to 6-2-2 (7))

Drive Recorder <Record on PC >

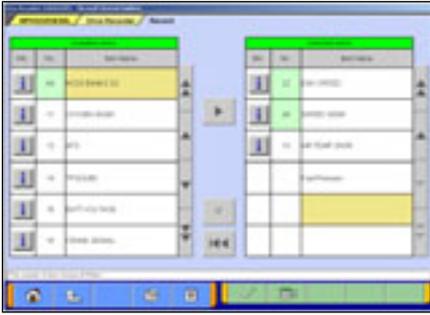

(4) Item Select


- Select an item you wish to record and apply the selection using button.

- Inserts the item selected in “Available items list” into the selected area of “Selected items list”.
- Inserts the item selected in “Selected items list” into the lowermost area of “Available items list”.
- Inserts all the items from “Selected items list” into the lowermost areas of “Available items list”.
- Changes the order in which the items are displayed in “Selected items list” and “Available items list”, in the sequence of default setting.

- When complete the selection, press button.

Note:

-A maximum of 16 items can be recorded.

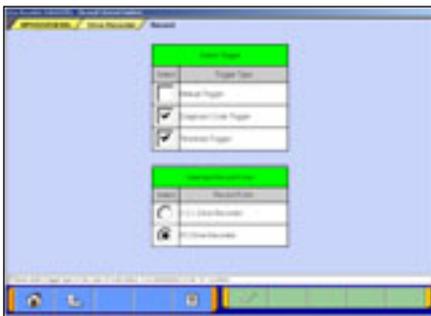


(5) Trigger method / Recording style Select

- Select trigger method, and put mark(s). (Multiple selection)
- Put mark on “PC Drive recorder”.
- When complete the selection, press button.

“Manual Trigger” -- Allows you to set the trigger manually. --to (8)


“Diagnosis Code Trigger” -- Applies the trigger when the specified diagnostic code is generated. -- to (6)

“Threshold Trigger” -- Applies the trigger when condition meets the set threshold. – to (7)

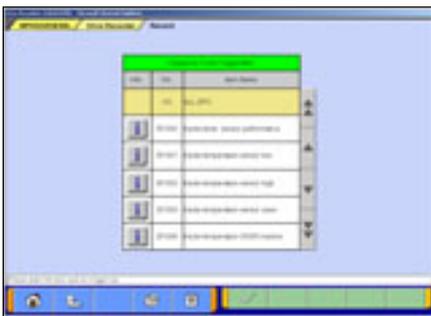

(6) When “Diagnosis Code Trigger” is selected in (5), the left screen appears.


- Select an item to be the trigger, and press button. --to (8). (If Threshold Trigger is selected as well, go to (7))

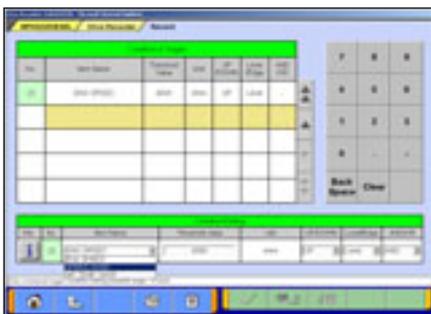

(7) When “Threshold Trigger” is selected in (5), the left screen appears.

- Select an item and edit conditions in *Condition Editing* table appearing at the bottom of the screen. (refer to 6-1-1(7))
- Then, press button to set the condition into selected area of *Condition of Trigger* table. (*Condition of Trigger* table can include up to 8 conditions)
- When completed the setting, press button.

Drive Recorder <Record on PC >

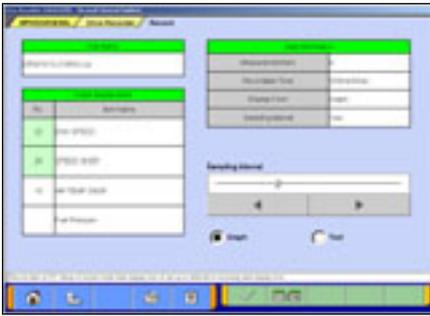

(8) PC Drive recorder setup

- Please confirm the contents of record setting, and set up the sampling interval with the cursor or button.
- Select a display format for recording (either **Graph** or **Text**) having a circle marked “”.

--Displaying item Select ('Graph' only)--to (9)

--OK -- to (10)


Note:

-The sampling interval time indicates the data-recording interval for one item. A setting of “0 sec” (fastest) results in the fastest sampling interval.

-Recordable time computes the number of the maximum record points as 20000 points, and is displayed. This is the prediction time on calculation and differs from actually recordable time.

-The configuration of the displayed file names is DR+ Year MonthDay + Time (military time including seconds), using the PC time. <DR: The file saved by the drive recorder>

-The setting value of a sampling interval can be chosen from 0sec(fastest)/1sec/10sec/1min.

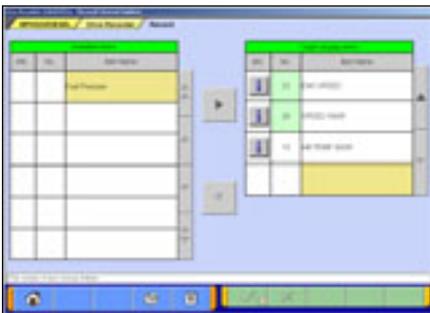

(9) Graph display item selection

Select the items you wish to display on the graph.

Selected 4 items are displayed during the recording.

The items not selected are not displayed on graph but the data are recorded.

-- OK -- to (8)



(10) Enter the record information (memo).

Enter the reference information, such as the vehicle model and diagnosed system name.

--OK -- to (11)

Note:

Because the unit is linked with the PC keyboard, you can enter the information either directly using the PC keyboard or by using the screen keyboard.




(11) The contents check of setting (1/3)

The list of recording settings appears.

--To check set items

--To check threshold trigger conditions (if selected)

Pressing starts recording – go to (14)

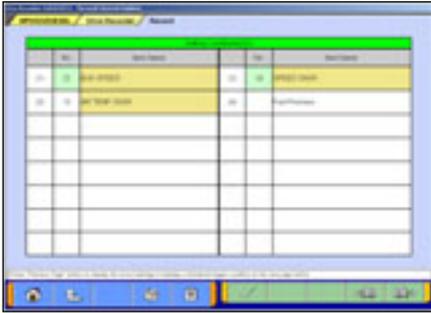

(12) The contents check of setting (2/3)

The list of set recording items appears.

 --To check threshold trigger conditions (if selected)

 --To check recording setting

Pressing  starts recording – go to (14)

Note:

When “Graph” is selected in (8), the background color of the name column of the item, which is to be displayed in graph during the recording, changes into yellow.




(13) The contents check of setting (3/3) (Only if selected in (7))

The list of threshold trigger conditions appears.

 --To check recording setting

 --To check set items

Pressing  starts recording – go to (14)

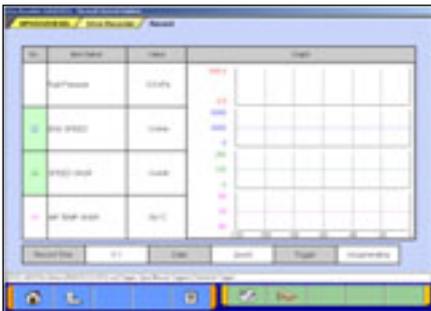

(a). Recording screen [Graph]

(14) Recording Data

[Graph]

It saves at the file, expressing data as the set-up record conditions. The four items chosen on (9) are indicated by graph as the left screen (a).

[Text]

When “Text” was chosen on (8), and a drive recorder is set up, it saves at a file, acquiring and expressing data as the set-up record conditions. (see the left screen (b))

 --Data record end --to (15)

When Trigger is not generated during data record, let the point at the time of a record start be time 0:00.0.

 --Manual Trigger occurs


However, when Diagnosis Code Trigger or Threshold Trigger are chosen as trigger conditions, suppose that it is invalid.

Note:

-Record is continued until record end button is pushed, even if trigger occurs.

-The availability of the hard disk of the PC is checked after record screen display and before record start. When the availability is 100MB or less, a message is displayed and record is stopped.

-When the number of record data reaches to 20000 points, a message is displayed and record is completed.

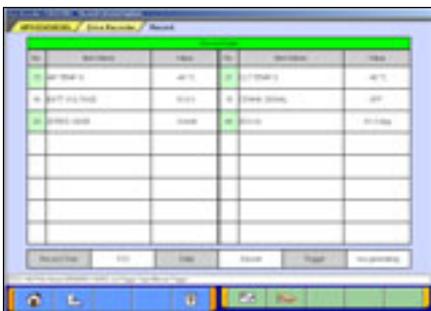

(b). Recording screen [Text]

Drive Recorder <Record on PC>



(15) Save record data

On the screens of (14), pressing  button ends the data acquisition and saves it, and then displays a dialog indicating completion of the record data saving.

 -- OK -- To Drive Recorder function select menu screen (Refer to (3)).



Note:

*In the case that there is no record data, a dialog is displayed confirming whether to stop the recording.

 -- OK -- To the drive recorder function select menu

 -- Cancel -- To (14) to start recording again.


(16) When you check the recorded data, **continue to 6-2-2.**

6-1-3. Reuse past setting condition

Record (Read Setting Conditions) button allows you to restore past recording conditions so that you can execute recording under the same conditions as those used with previously recorded data files.



- (1) Press **Record (Read Setting Conditions)** button on the Drive Recorder function menu. (refer to 6-1-1(3))

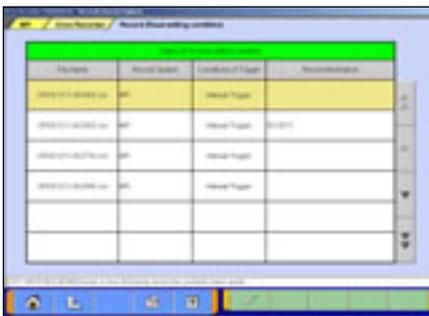


- (2) Select the data you wish to restore, and press button.
The data was recorded using V.C.I.: To 6-1-1(8)
The data was recorded using PC : To 6-1-2(8)

6-2. Recorded Data Handling


6-2-1. Transmit data on V.C.I. to PC

To view the data recorded on V.C.I., you need to transfer it from V.C.I. to PC first. Connect V.C.I. and PC using a USB cable and operate following procedures.

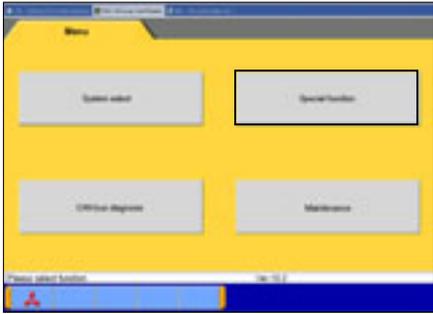


- (1) You can transfer the data using only V.C.I. and PC, without connecting to the vehicle. Press **Special Function** button on the STV Top Menu.--to (2)


Or, if the V.C.I. is already connected to the vehicle, you can press **Data display** from the function menu of the recorded system to regenerate the data. (Refer to 6-1-1(3)) --to (4)

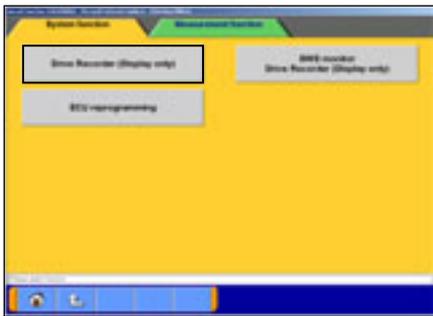

- (2) Select the **System Functions** tab on the upper part of the screen, and then press **Drive Recorder (Display only)** button.

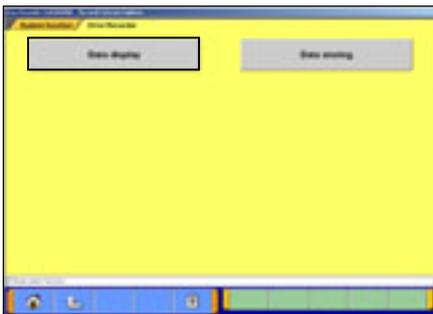


- (3) Press **Data display** button.

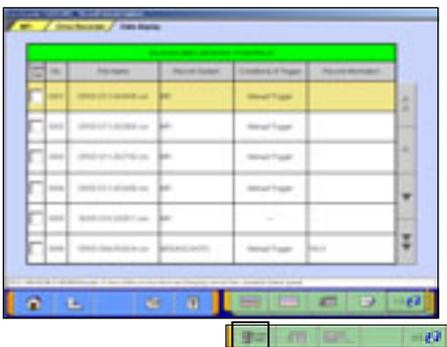

- (4) File List
Press button to view 2/2, and press button.

Drive Recorder <Transfer Data to PC>

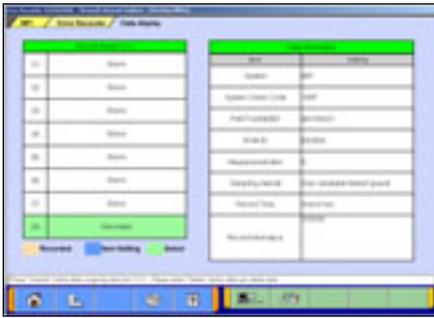


(5) Display of V.C.I. Data

The status of V.C.I. recording area is displayed.

Select a data to be transferred into PC, and press .

--to (6)

When you wish to delete a data, select it and press .

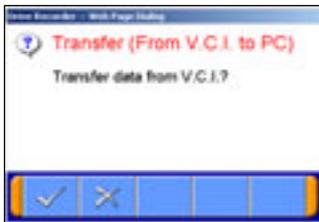


(6) Transfer Confirmation

Press  button.



(7) The data is being transferred from V.C.I. to PC.

Please wait for a while.

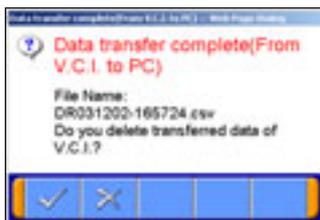


(8) After completion of data transfer, a dialog box appears asking whether to delete the data on V.C.I..

 : Deletes the data, then returns to screen (5).

 : Returns to screen (5) without deleting the data.

6-2-2. Data Edit Functions

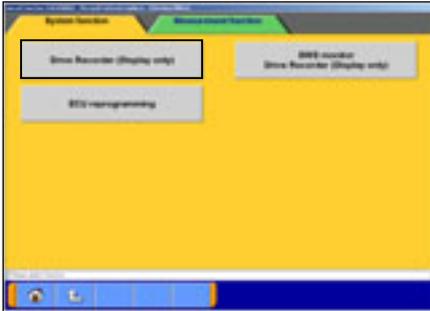


- (1) Press **Special Function** on the STV Top Menu. Then select **System Functions** tab on the upper part of the screen, then press **Drive Recorder (Display only)**.

Or, if V.C.I. is already connected to the vehicle, you can press **Data display** on the function menu of the recorded system. (Refer to 6-1-1(3)) --to (3)



- (2) Press **Data display** button.

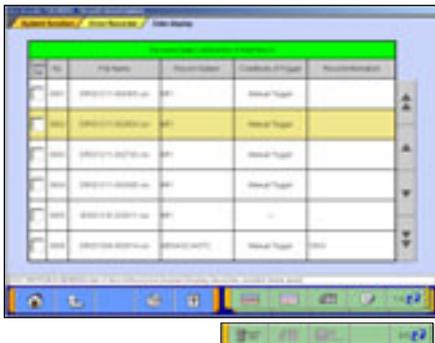

- (3) Recorded data file list
 -The file list of the drive recorder (and data list records) saved into the PC is displayed.
 -You can view the data details by selecting the data you wish to view from the list and pressing  button.
 In addition, you can view graph data by pressing   button. (to 6-3-1(3))
 -The background color of the line containing the selected file changes into yellow.

-  -- Edit record information -- refer to (4)
-  -- Delete the data file -- refer to (5)
-  -- Save the data file -- refer to (6)

Note:

-The configuration of the displayed file names is DR+Year Month Day+Time(military time including seconds), using the PC time.


-The most recent recorded data appears on top of the list.

-Those file names, which begin with “SD”, contain the data of Data List records. (Refer to 4-2-2.(2))

Caution: About “CSV file”

If you open the CSV file on M.U.T.-III using EXCEL, never overwrite and save it. (However, they are allowed after the file is transferred from M.U.T.-III to another PC or copied in another folder.)


Drive Recorder <Edit Data>

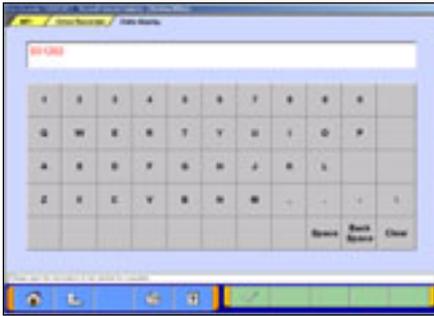

(4) Edit Data Information


1. Select a file to edit and press  button to display the screen illustrated on the left, where you can edit the record information that was entered in 6-1-1(10) or 6-1-2(10).

Press  button.

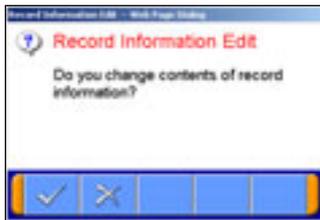

2. Edit Confirmation

Press  button. → returns to (3)

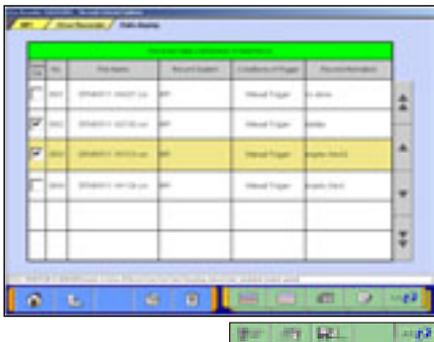

(5) Delete Data


1. To delete a data file loaded on the PC, click the check box next to file No. in the file list (refer to (3)) to place a check mark, and press  button.

(Two or more check marks can be placed.)

Note:


 mark will be displayed, if cursor is moved on a check box and it clicks. (Selection)

 mark is eliminated by clicking again. (Selection release)

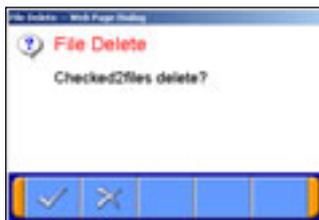

2. File Delete Confirmation

A message appears asking if you wish to delete the data file. Press  button to delete the file.

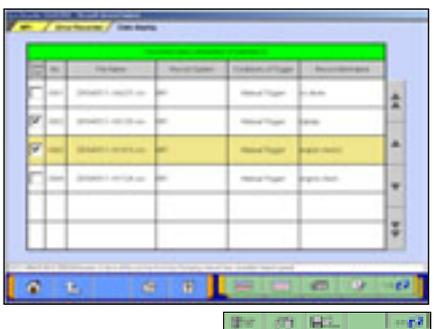

(6) Save Data

1. The data file can be saved to a removable disk (floppy disk or memory card).

-Insert a disk into the PC, first.

-Click the check box next to the file No. in the file list to place a check mark, and press  button.


(Two or more file selections are possible.)

Note:


 mark will be displayed, if cursor is moved on a check box and it clicks. (Selection)

 mark is eliminated by clicking again. (Selection release)


Drive Recorder <Edit Data>

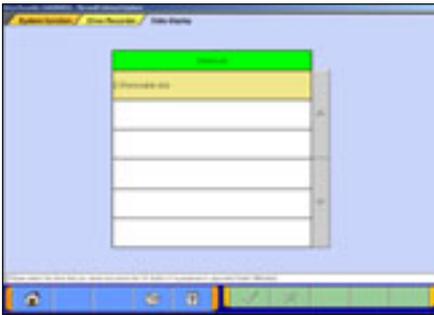


2. Drive Select
Select a drive for saving the data files, and press  button.

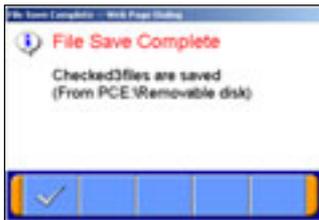

3. Data Saved
The files are saved. Press  button.

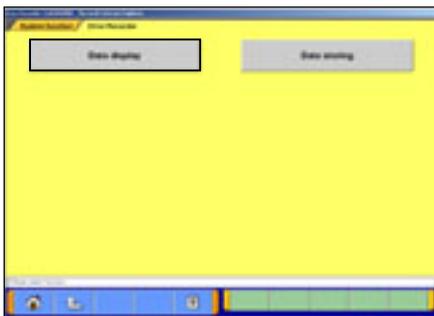

- (7) Data Storing
 1. The data saved in a removable disk before can be stored into the PC.
 - Insert the disk into the PC, first.
 - Press **Data Storing** button on the Drive Recorder function menu. (Refer to (2))

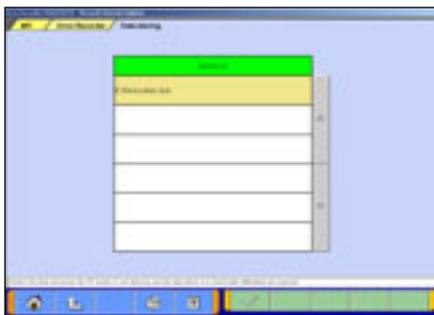


2. Drive Select
Select the drive storing the data.




3. Data Storage Complete
The data has been loaded to PC.
Press  button.

6-3. Display and Analysis of the Recorded Data


6-3-1. Display the recorded data

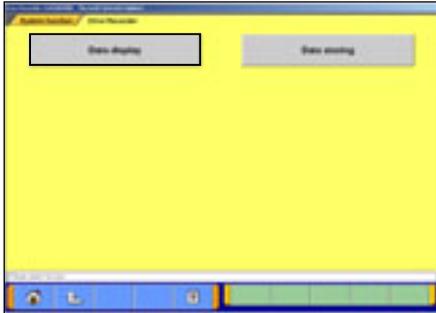

- (1) Press **Special Function** on the STV Top Menu.
Then select the **System Functions** tab on the upper part of the screen, and press **Drive Recorder (Display only)**, then press **Data display** button.
-Or, if the PC is connected to the vehicle through V.C.I., you can press **Data display** on the function menu of the recorded system.

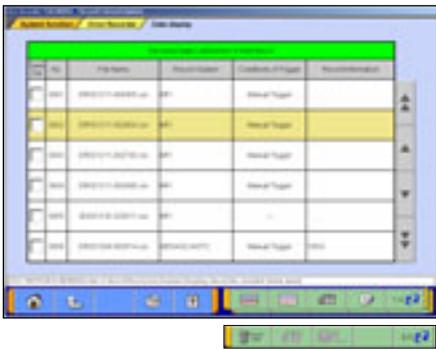

- (2) Recorded data file list
Data file list that contains record of Drive recorder and Data list saved in PC will be displayed.
You can view the data details by selecting the data you want to display from the list and pressing button.
In addition, you can view graph data by pressing or button.
-The background color of the line containing the selected file changes into yellow.

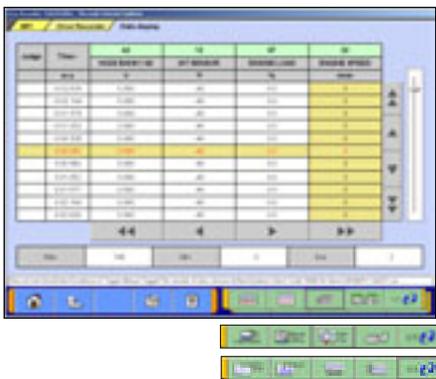



Displaying Graph 1


-  --Text data
-  --Graph data 2
-  --Select item (to (4))
-  --Edits extraction conditions (to 6-3-2.(1))
-  --Jumps to a trigger point
-  --Saves data (to 6-3-2.(3))
-  --Displays a correlation diagram (to 6-3-3.(1))
-  --Displays a distribution chart (to 6-3-3.(2))
-  --Change Time Scale
-  --Change Data Scale
-  --View 1/3
-  --View 2/3
-  --View 3/3



Displaying Graph 2

Displayed items are overlaid on a graph.

-The function buttons are the same as Graph1.

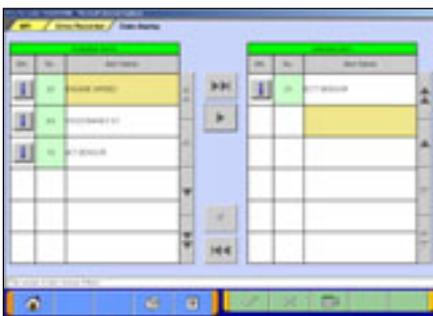

(4) Select item

 button allows you to select items to be displayed from recorded data.

When complete the selection, press  button.

The item number of service data OBD basic items appears green.

-  --Inserts all the items from "Available items list" into the selected areas of "Selected items list."
-  --Inserts the item selected in "Available items list" into the selected area of "Selected items list".
-  --Inserts the item selected in "Selected items list" into the lowermost area of "Available items list".
-  --Inserts all the items from "Selected items list" into the lowermost areas of "Available items list."
-  --Changes the order in which the items are displayed in "Selected items list" and "Available items list," in the sequence of default setting.


6-3-2. Extraction and Search of the recorded data

Recorded data can be extracted or retrieved for display on predetermined conditions.

<Extraction: Only matching data will be displayed>

<Retrieval: Matching data will be displayed with *(asterisk)>

Time range, threshold of item etc. can be set as condition of extraction or retrieval.

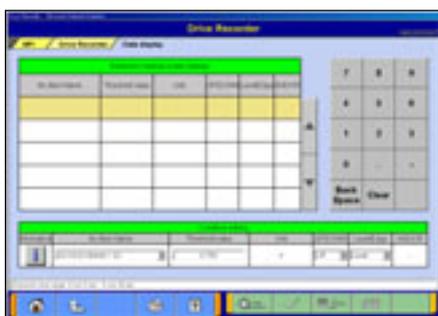

(1) Condition setting for data extraction

Extraction condition setting screen shown on the left will be displayed after pressing  button on text/graph display screen.

- Select an item and edit its condition in *Condition editing* table appearing at the bottom of the screen.

Condition editing table

“UP/DOWN”: Threshold or higher / Threshold or lower

“Level/Edge”: Matching data / Data as of the time when it turns to be matching from not matching

“AND/OR”: -Data matching with both of this condition and the other one upper row on *Extraction Setting* table/
-Data matching with either of this condition or the other one upper row on *Extraction Setting* table

- Then, press  button to add the condition onto *Extraction Setting* table.
(*Extraction Setting* table can include up to 8 conditions.)
- Press  button to display extracted data only in text/graph.


 --Set Time extraction condition.

 --Delete selected extraction condition data.


Time extraction condition setting

After pressing  button, time extraction condition setting screen shown on the left will be displayed. Set time range on this screen and press  button to display extracted data only.

 --Return to data extraction condition setting screen.

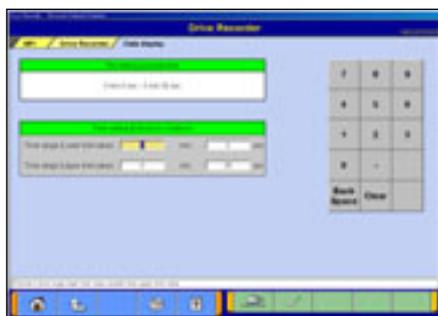

Drive Recorder <Analyze Data>

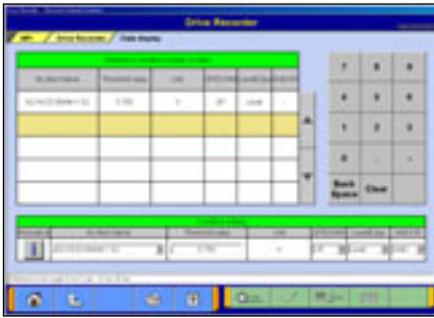

(2) Conditions setting for data search

Condition setting screen shown on the left will be displayed after pressing  button on text data display screen.

- Select an item and edit its condition in *Condition editing* table appearing at the bottom of the screen. (See (1) for more details.)
- Then, press  button to set the condition onto *Retrieval condition* table. (*Retrieval condition* table can include up to 8 conditions.)
- Press  button to display text data screen showing * (asterisk) in the Judge column of the data matching with the retrieval condition.



 --Set Time retrieval condition.

 --Delete selected condition.

Time retrieval condition setting

After pressing  button, Time retrieval condition setting screen shown on the left will be displayed. Set time range on this screen and press  button to display text data screen showing * (asterisk) in the Judge column of the record data matching with the retrieval condition.



 --Return to Search conditions setting screen.



(3) Data save

When pressing  button on the screen of displaying data, you can save the extracted or retrieved data into the PC.

As the left dialog box appears, press  .


Note: The configuration of the file name is original data file name + alphabet (a,b..z).

6-3-3. Diagram and Chart


(1) Setting the Correlation Diagram

Pressing  button on the screen illustrated in 6-3-1(3) displays the correlation diagram settings screen as illustrated on the left.

Setting the target data time range, item names and data display range and pressing  button displays the correlation diagram.

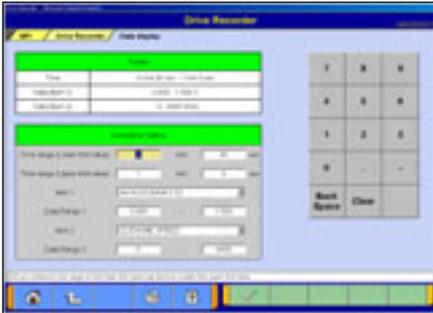

<Correlation Diagram>

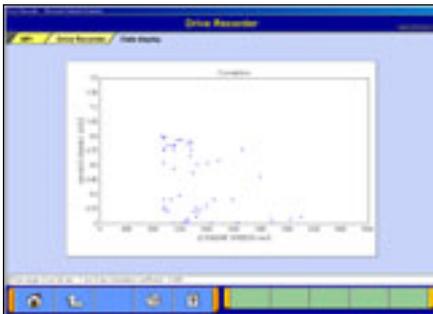


(2) Setting the Distribution Chart

Pressing  button on the screen illustrated in 6-3-1(3) displays the distribution chart settings screen as illustrated on the left.

Setting the target data time range, item names, data range, division width, and frequency range and pressing  button displays the distribution chart.



<Distribution Chart>

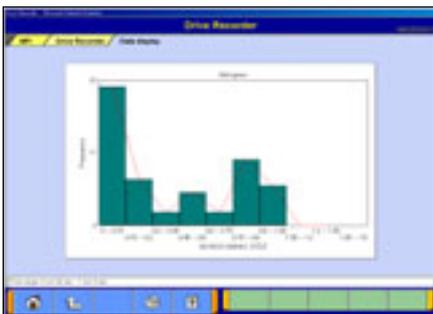

6-3-4. Other Functions



(1) Changing Item Display Order

On the data list display screen, you can change the display order of the items. The change is possible for both text display and graph display.


-Selecting the name display area of an item fixes the item.

-Then over-scrolling only the items not selected using scroll keys changes the order.

-The selection can be released by selecting the item again.

-The function is not activated while a data range display area is selected in the data range change function.

(Selection, release, and scroll functions of item are not available.)

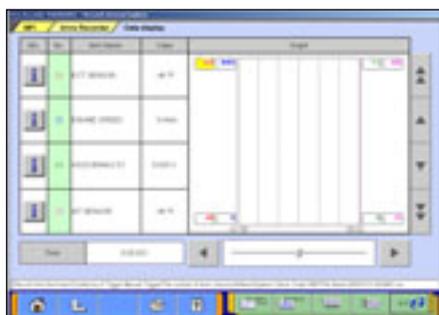

(2) Data Range Change

Select a data range display area on the graph.

When the color of the selected area turns into yellow, you can enter values.

Entering method: Use PC keyboard or scroll keys.

-When the PC keyboard is used, enter a value from the keyboard and then press the [Enter] key or release the selection of the data range display area to determine the data range change.

-When the scroll keys,  and , on the screen are used for the data range change, pressing the  key each time changes the data range setting by +5 % of full scale and the  key changes it by -5 %. The change is determined at each key pressing.

Chapter 7 SWS Monitor


7-1. SWS Monitor Operation

Precautionary Notes

Prior to connecting or disconnecting the SWS monitor and vehicle, be sure to turn the ignition switch OFF.

1. If the SWS monitor is connected to the column switch connector, connecting the SWS monitor cartridge and V.C.I. prior to V.C.I. power activation may cause damage to the V.C.I. Refer to connection instructions for more details – connect the monitor cartridge after the V.C.I. is connected to the vehicle and the V.C.I. power switch is ON.
2. If you wish to use the SWS monitor continuously for a long period of time, the V.C.I. and SWS cartridge will consume power. Take extra precautions to ensure that the battery does not die during use.
3. Use of cellular phones and amateur radios near the SWS monitor during use may cause the SWS monitor to not function properly. Avoid using such apparatuses near the monitor during use.
4. During use, the SWS monitor may affect systems employing weak electric currents such as GPS systems.
5. The tip of the door communication probe is sharp. Be careful during handling.

7-1-1. SWS Monitor Function

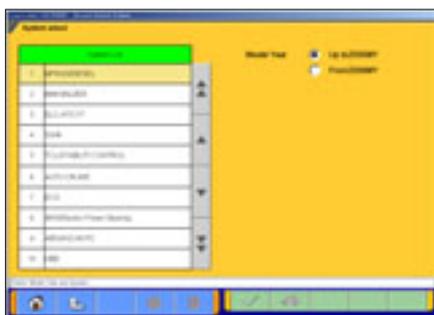

(1) System Select

Select “**SWS**” on the System Selection screen.

(For instructions on how to select a system, refer to [3-3-1](#))

Note:

SWS monitor cartridge is required in M.U.T.-III as well for SWS monitor. For details regarding how to connect the cartridge and harness, see the M.U.T.-II reference manual (Pub. No. MSSP-310B-2002) or the service manual data of each vehicle.



(2) Function Select

Press **SWS MONITOR** button on the SWS function menu.

Note:


If the SWS monitor cartridge is not connected to the vehicle, **SWS MONITOR** button does not appear.

SWS Monitor




- (3) Function Select
 The SWS monitor menu screen appears.
- ECU Comm Check** -- to 7-1-2.
 - Data List** -- to 7-1-3.
 - Function Diag.** -- to 7-1-4.
 - Drive Recorder** -- to 7-1-5.

7-1-2. Checking ECU Communication

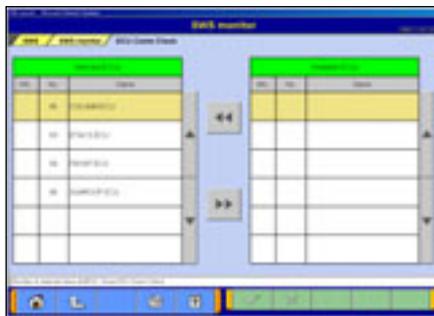


- (1) Item Select
 The item selection screen appears.
 Select items to check and press  button.

Note:
 All items are selected as default.

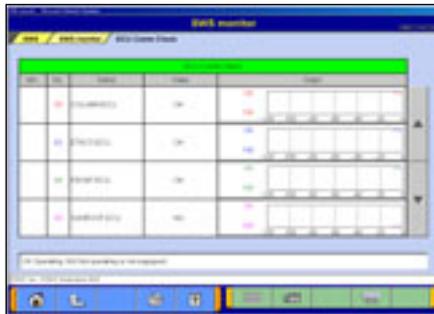


- (2) Displaying Graph
 "OK" appears if the ECU is communicating properly, and "NG" appears if there is a communication error. "NG" also appears if the system has not been installed or is installed but not communicating. Prior to performing the check, therefore, it is necessary to identify the system for the monitored vehicle.

-  --Change Time Scale
-  --View text style--to (3)

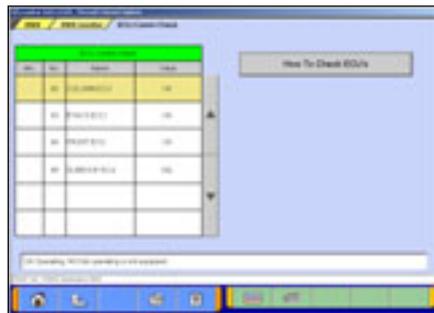

- (3) Displaying Text style
 If you press **How to Check ECU's** button, you can view the Service Manual. (Not Available in US, Australia)

7-1-3. Data List

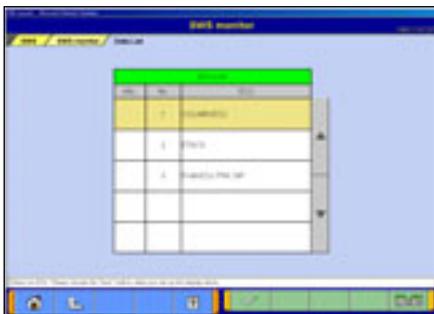

- (1) Item Select
 Select an ECU to monitor from the Data List, and press  button.
-  --Item Select


SWS Monitor



- (2) Displaying Graph
-  --View text --to (4)
 -  --Change Time Scale
 -  --Change Data Scale



- (3) Displaying Texts
- Data List Reference Table**--Displays the Data List of the Service manual. (Not Available in US, Australia)
- Simulated Vehicle Speed Output**--
Allows you to simultaneously view the Simulated Vehicle speed and Data List. --to (5)
-  --View graph

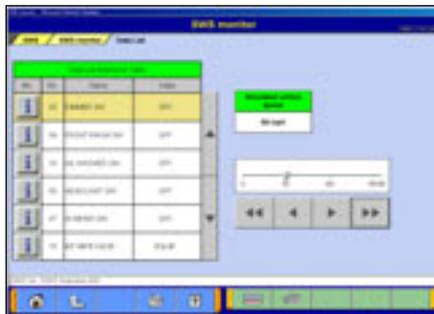

- (4) Simulated Vehicle Speed Output
- The Simulated Vehicle speed output function displays the simulated vehicle speed and Data List simultaneously. Speed output can be changed in 1 mph or 10 mph increments using the speed adjusting buttons.
-  --Unit: 1mph
 -  --Unit: 10mph
 -  --View graph

7-1-4. Function Diagnosis




- (1) Press **Function Diag.** button on the screen illustrated in 7-1-1(3). Select the function you wish to diagnose and press  button.



- (2) Select a detailed function and press  button.
-  --Item Select

SWS Monitor

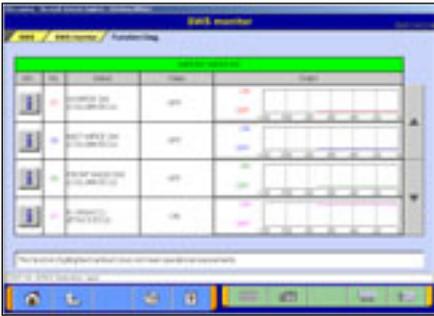

- (3) Displaying Graph
 -  --View Text --to (4)
 -  --Change Time Scale
 -  --Change Data Scale

Note:

If required operating conditions are not met, the item number appears in pink color.




- (4) Displaying Text
 - Data List Reference Table**: (Not Available in US, Australia)
Displays the Data list of the Service manual.
 -  --View Graph

Note:

If required operating conditions are not met, the item number appears in pink color.

7-1-5. Drive Recorder Function

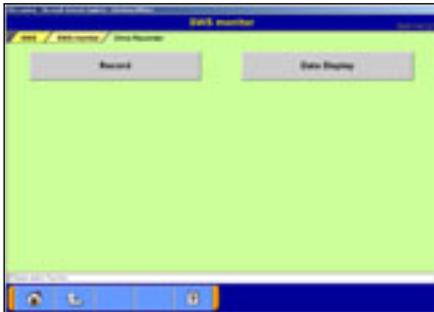

- (1) **Record**
 - Records data such as Data List in the built-in memory of SWS monitor cartridge. to (2).
 - Data Display**
 - Displays the data recorded with the drive recorder. to (9).



- (2) The left figure is displayed when the last record remains. Erase recorded data in SWS monitor cartridge, before record data. Press  button.



- (3) Recording Data
 - Select an item you wish to record.
 - ECU Comm Check** --to (4)
 - Data List** -- to (4) after ECU selection
 - Function Diag.** -- to (4) after function selection.

SWS Monitor





- (4) Selecting the Trigger Method

Manual trigger--

Allows you to apply the trigger manually.

Item trigger--

Allows you to select one or two items and uses the ON or OFF signal of the item(s) as a trigger to start recording.

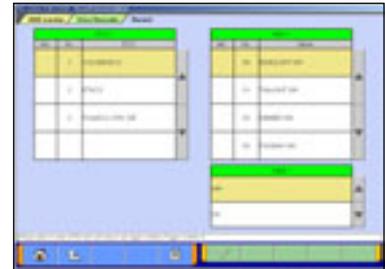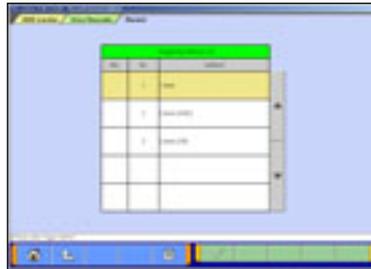

- (5) Setting the Recording Time

The recording time can be set from 0day 0h 0min to 5days 0h 0min. If you do not wish to set a recording time, press button without setting the time.


The day and time are set using .

-Day--Unit: 1 day

-Hour-- Unit: 1h, Unit: 5h

-Minute-- Unit: 1min, Unit: 10min

You can also set the time using the slide bars.

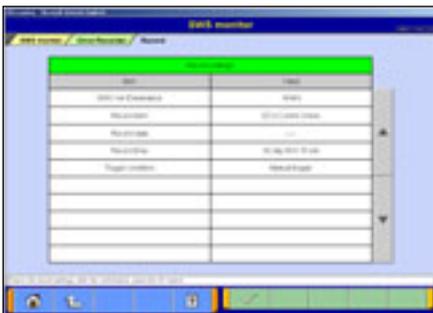

- (6) Checking the Recording Settings

Check the recording settings and press button to transmit the data to the SWS monitor cartridge.

A message appears indicating that the recording settings will be transmitted to the I/F cartridge. Press button.



- (7) Recording Using the Drive Recorder

Once the data have been transmitted to the SWS monitor cartridge, the screen shown at left appears. If the trigger set was a manual trigger, press button to start recording. If the trigger set was an item trigger, recording begins when the set conditions are met.


Note:

To disconnect the SWS monitor cartridge, press button. The following message appears: "Do you wish to disconnect the I/F cartridge? (If so, select YES, then wait for the ready message to appear.)" Once the ready message appears, disconnect the cartridge.

SWS Monitor



- (8) Ending Recording
To end recording, press  button.

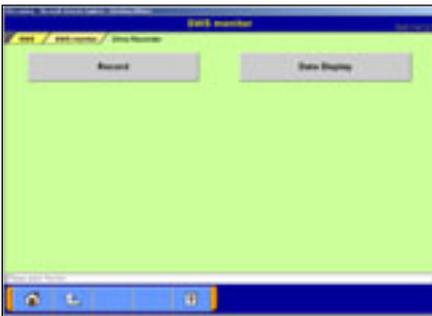


- (9) Data Display
Select **Data Display** button on the screen of (1).
You can also display recorded data by returning to the STV Top Menu, selecting **Special Functions**, then selecting the system function **SWS Drive Recorder**. In this case, you can view the data without connecting V.C.I. to the vehicle by using an AC-DC adapter (MB991878).




- (10) You can set a time in which you wish to regenerate and view the data as described below.
The day and hour can be set using  buttons.

After the setting, press  button.

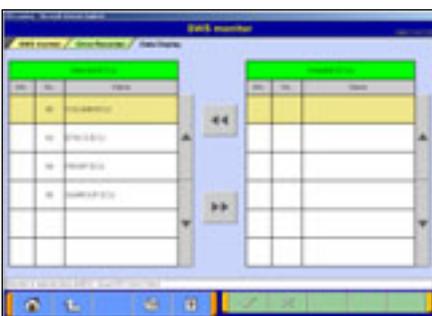

- (11) Displaying Recorded Data
Select the items you wish to display and press  button.

Note:
All items are selected as default.

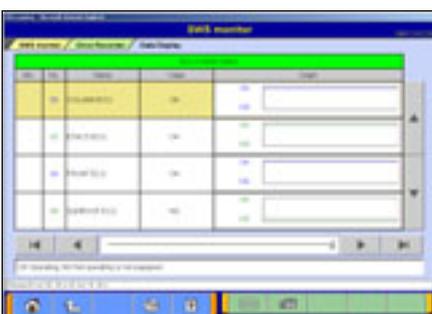

- (12) Displaying Data
The recorded data are displayed in graph format by default.
 -- View Text
 --Jumps to the previous/next variation point of the selected data.
 --Displays the previous or next record.
(You can also set the settings by operating the slide bar.)


Chapter 8 Coding Function

8-1. VIN Writing Function


- This is the function for VIN writing into ECU, which is required by U.S. regulation. You need to set it for a new installed ECU when replace ECUs.
- In case VIN has not been written into ECU, DTC (Diagnostic Trouble Code) will be stored and the MIL (Malfunction Indicator Lamp) will light up.

8-1-1. VIN Writing Function

- (1) Select “MFI” system on the System Selection screen.
(For instructions on how to select a system, refer to [3-3-1](#))
Note:
-If the engine is OBD, the check code appears.
-As a selection screen asking whether MITSUBISHI or DaimlerChrysler appears, select a button that the engine belongs to.

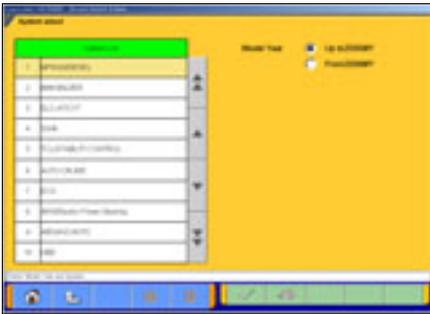

- (2) Select **Coding** button on the Function selection screen.

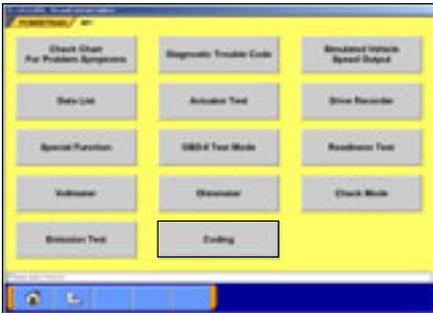


- (3) The screen illustrated on the left appears. Select **VIN Writing** button.

Note:

VIN Information --to 8-1-2.



- (4) Currently registered VIN is displayed on “Current VIN” box. Input a new VIN in the “NEW VIN” input box and then press  button.

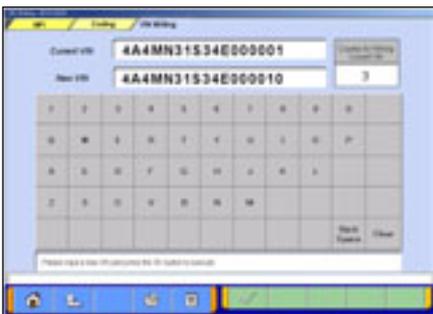


Coding Function



- (5) A confirmation dialog box appears.
Press  button to execute VIN writing.

When VIN writing is complete, another dialog box appears.
Press  button again.

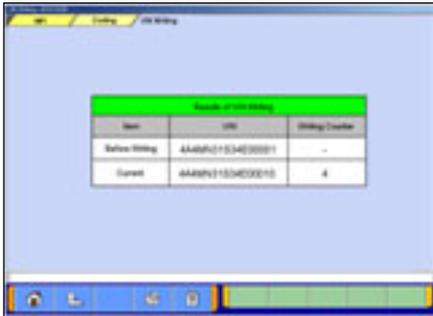

- (6) The Results of VIN Writing are displayed.
To exit this screen, press  or  button.

8-1-2. VIN information display



- (1) Select **VIN Information** button on 8-1-1(3), and the screen illustrated on the left appears.

To exit this screen, press  or  button.

Chapter 9 CAN Bus Diagnosis


9-1. Diagnosing the CAN Bus

< CAUTION >

- When you execute CAN Bus diagnosis, use M.U.T.-III main harness A.
- When you execute CAN Bus diagnosis, halt the vehicle.
- Calibrate ohmmeter to 0 point periodically for proper diagnosis. (refer to 11-2-2.)

9-1-1. CAN Bus Diagnosis

(1) Start Screen

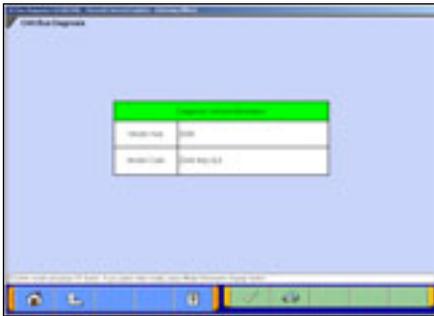


Press **CAN Bus Diagnosis** button on the STV Top Menu (illustrated on 3-2), then the left screen appears.

Confirm the contents of Diagnosis Vehicle information list on the screen.

- If the contents are describing the vehicle, press . → (2)
- If the contents are not describing the vehicle, press to correct the information. (refer to 3-3-2)

(2) Equipping System Setup

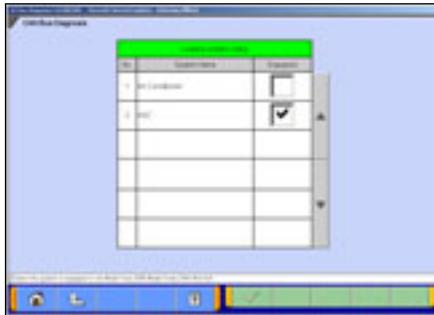


Put a check mark if the equipment is existence, and press button.

Note:

- ✓ mark will be displayed, if you move cursor onto a check box and click it. (Selection)
- ✓ mark will be eliminated, if you click again. (Selection release)

(3) CAN Bus Diagnosis

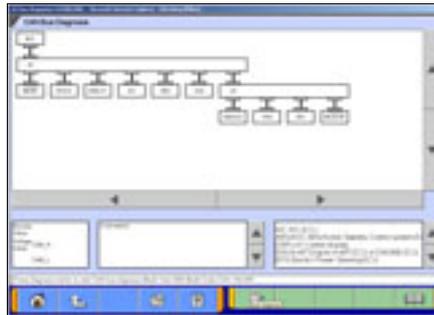


Pressing button starts the CAN bus diagnosis process.

Note:

The right lower message box shows the details of ECU names displaying on the configuration screen.

(4) Results

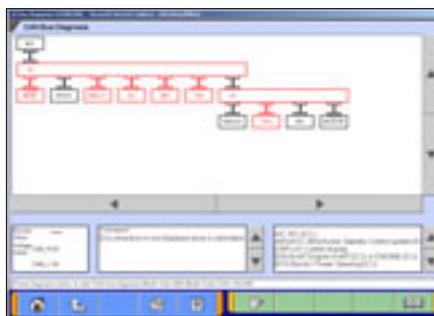

The results of the diagnosis are reflected on the configuration screen (Error locations are indicated in red), and the comment is shown on the center lower message box.

--Displays the data of the Service manual pertaining to the error locations. (Not Available in US, Australia)

ECU Reprogramming

Chapter 10 ECU Reprogramming

Notes:

- This function enables the program installed in ECU to be reprogrammed using M.U.T.-III.
- As VIN or other setting information on ECU is not erased by this reprogramming, you do not need to rewrite VIN.

10-1. Process Flow Chart

■ Reprogramming by K-Line communication system

- There are 7 different ways for ECU reprogramming as shown below.
- Procedure (a) is recommendable due to the most simple in operation.
- File extension code is “ .rpg”.

Process flow chart

(Chapter No.)

Device		V.C.I. alone			PC + VCI (Optional)			
Procedure name		(a) Auto data retrieval	(b) Load RPG file	(c) ECU reprogram	(d) Automatic reprogramming (K-line)	(e) Database File Display	(f) Reprogram Data Selection	(g) Search
Data selection method		Automatic	Select from Data library	-	Automatic	Select from data library in PC	Select from data library in any drive	Select by key of vehicle info.
1	CD-Rom => PC	10-3-1	10-3-1	-	10-3-1	10-3-1	10-3-1	10-3-1
2	PC => memory card	10-4-1	10-4-1	-	-	-	-	-
3	memory card => VCI	10-4-2 + 10-4-3(a)	10-4-2 + 10-4-3(b)	-	-	-	-	-
4	PC => VCI (Not via memory card)	-	-	-	10-5-1 + 10-5-2(a)	10-5-1 + 10-5-2(b)	10-5-1 + 10-5-2(c)	10-5-1 + 10-5-2(d)
5	VCI => ECU	10-4-4	10-4-4	10-4-3(c)+ 10-4-4	10-5-3	10-5-3	10-5-3	10-5-3
Note		Recommended	In case of (a) failure	Special use only (When data stored in VCI)	In case memory card is N/A	In case memory card is N/A and (d) failure	In case memory card is N/A and (d) failure	In case memory card is N/A and (d) failure

■ Reprogramming by CAN communication system

- This is the only way for reprogramming by CAN communication system.
- This procedure allows you to select an arbitrary system (ECU) to reprogram as required.
- File extension code is “ .cff”.

Device		PC+V.C.I.
Process name		Automatic Reprogramming (CAN)
Data selection		Automatic
1	CD-Rom => PC	10-3-1
2	PC => VCI => ECU	10-6

ECU Reprogramming

10-2. Equipments

Necessary parts for ECU reprogramming are as follows


Parts Name	Parts Number
M.U.T.-III Personal Computer	-
Update CD-ROM of reprogramming data	-
CF Memory card (128MB)	MB991853
CF Memory Card Adaptor	MB991939
V.C.I.	MB991824
M.U.T.-III Main Harness A (44-16) *1	MB991910
M.U.T.-III Main Harness B (44-16/12)	MB991911
Reprogramming adapter Harness (12-13) *2	MB991855

← Only when reprogramming with V.C.I. alone

Remarks

- * 1: Vehicle which is only equipped with a 16 pin data-link-connector.
- * 2: Vehicle which is equipped with 16 pin and 13 pin data-link-connector.


V.C.I.
(MB991824)

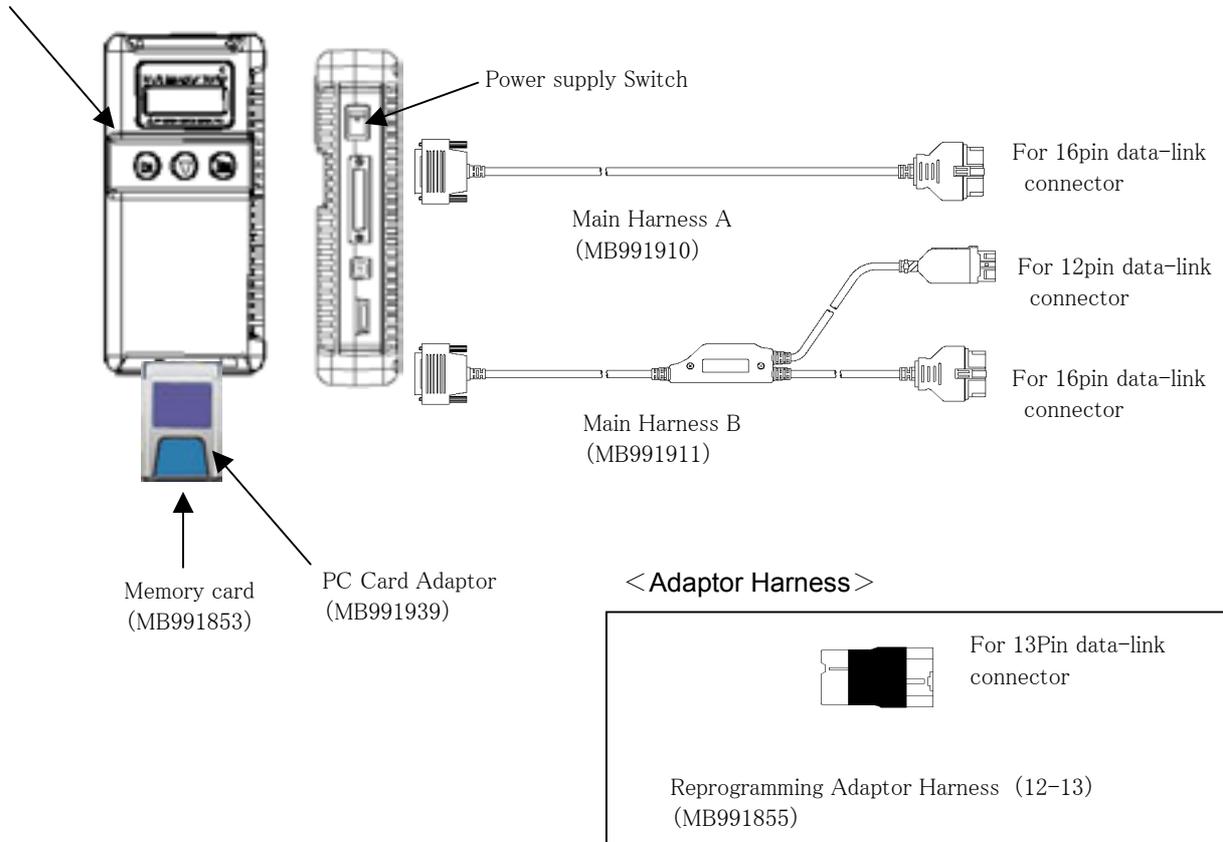


10-3. Data preparation on PC from Update CD-ROM

10-3-1. PC Update Operation (CD-ROM → PC)


(1) When an Update CD-ROM of ECU reprogramming data is distributed newly, insert the CD-ROM into CD-drive on PC.

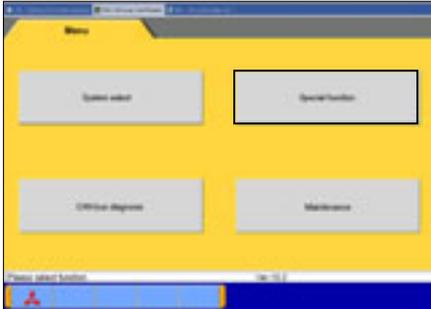


(2) Press **Special function** button on STV Top Menu.

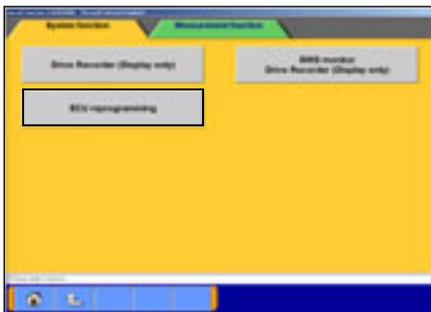

(3) Select **System Function** tab, and press **ECU reprogramming** button.

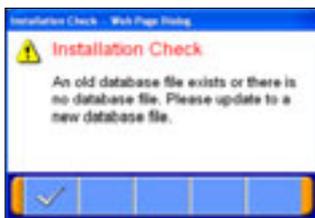

(4) The message "Please update to a new database file." is displayed when the new Update CD-ROM is recognized. Press button.

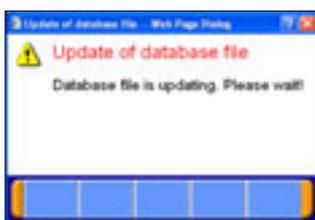

(5) The message "Please wait!" is displayed during progress. When complete the updating, the message disappears. You can remove the CD-ROM from PC.


10-4. Reprogramming Operation (V.C.I. alone)

10-4-1. Data transfer (PC → Memory Card)




- (1) Start up the M.U.T.-III system.
 Insert the Memory card (MB991853) into the Card Adaptor (MB991939), and then insert them into m-card slot on PC.

 The following window appears when the card has been inserted properly. Wait till the message disappears.

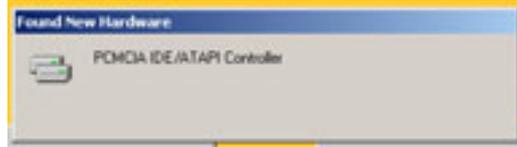


- (2) Press **Special function** button on STV Top Menu.

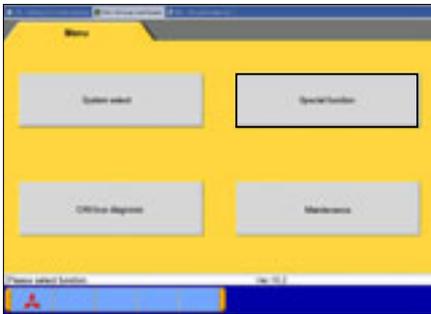


- (3) Select **System Function** tab,
 and press **ECU reprogramming** button.

Caution:
 -In case an update CD-ROM is set in the PC with update undone, data update starts. (refer to 10-3-1(4))

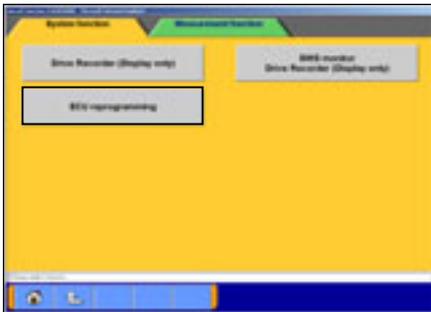


- (4) Press **Memory card transfer** button.
 ALL reprogramming data in the M.U.T.-III PC are transferred to the memory card.


[Caution]
 -Do not remove the memory card from PC.

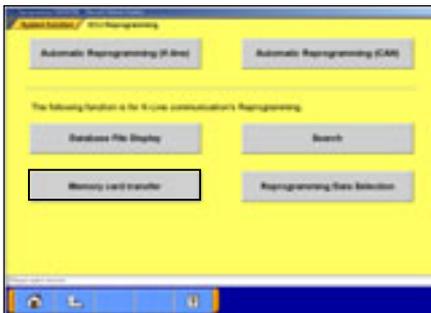


- (5) Select a memory card drive, and press  button to start transferring.

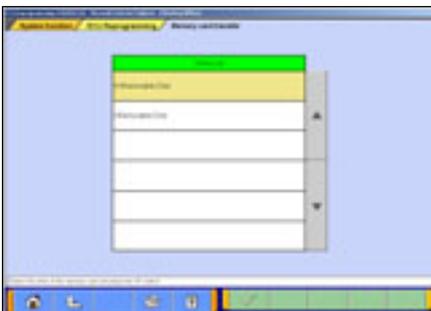


ECU Reprogramming

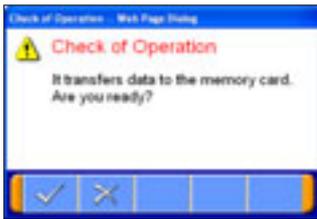

- (6) Press button when the message "It transfers data to the memory card. Are you ready?" appears

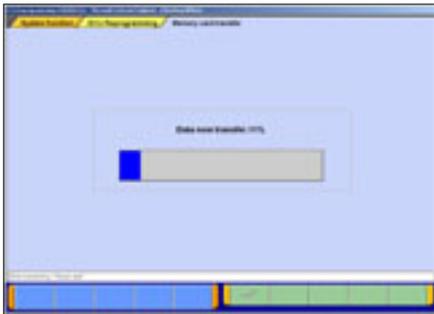

- (7) Data transfer
The progress bar is displayed during the transfer.

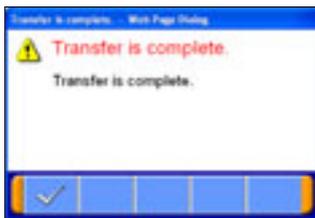


- (8) The data transfer is complete.
Press button.



- (9) Before you remove the memory card, double-click the below icon for removal of the adaptor.




Double click here

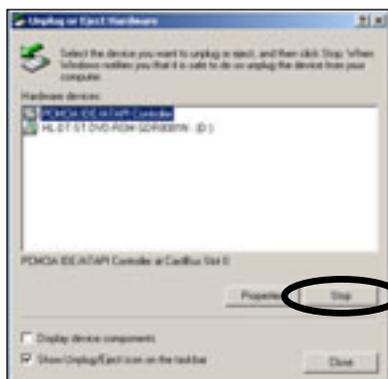


- (10) Select [*PCMCIA IDE/ATAPI Controller*] or the other appropriate device, then press **Stop** button.

ECU Reprogramming

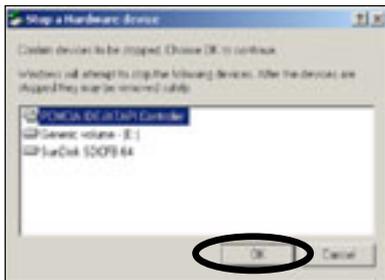

(11) Verify the contents of the selection, then press **OK** button.

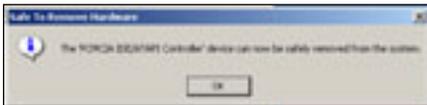

(12) After displayed the message “The device can now be safely removed from the system”, push the lever on the side of PC card slot and remove the memory card.

Caution:

Do not remove the memory card away unless complete above method or turn off the PC.

10-4-2. Equipment Set-Up

(1) Insert the Memory card (MB991853), which is storing the reprogramming data, into the Card adaptor (MB991939) and insert them into V.C.I. main unit (MB991824)

(2) Connect M.U.T.-III Main Harness B (MB991911) or A (MB991910) to V.C.I. main unit securely. (Refer to 10-2.)

Note:

Select appropriate harness by instruction below.

- Main harness A: For vehicle only equipping 16 pin data-link-connector.

- Main harness B: For other vehicles.

- Adaptor harness (12-13): Outlander, Montero (after '02MY)
(To connect Main harness B and 13pin data-link-connector)

(3) After verifying the ignition switch position at LOCK (OFF), connect the M.U.T.-III Main harness B or A to the data-link-connector.

(4) Turn Ignition switch on, and turn V.C.I. main switch on.
(Do not start engine)

ECU Reprogramming







10-4-3. Data Retrieval (Memory card → V.C.I.)

[\(a\). Automatic Data Retrieval](#)

[\(b\). Select and Load Data](#)

[\(c\). \(Special case\)](#)

(a). Automatic Data Retrieval

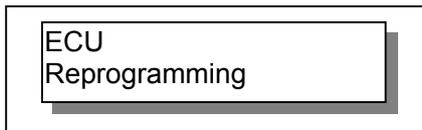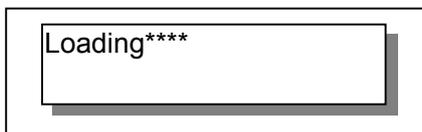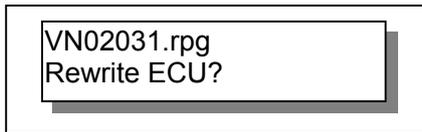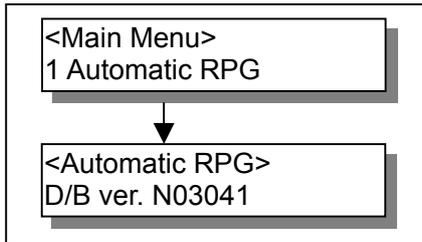

- (1) Select “Automatic RPG” in main menu and press Enter key. Version No.of data base file appears.

By waiting 10sec or pressing Enter key, V.C.I starts communicating with ECU and retrieves reprogramming data file with the ECU’s parts No.and ROM-ID.

- (2) The appropriate reprogramming data file No.is displayed. Pressing Enter key starts transferring the data file into V.C.I built-in-memory.

Remark:

- To search another data, press Esc key. If another appropriate reprogramming data exist, it will be displayed.

- The message bellows are displayed depends on ECU parts No, ROM-ID and condition of ECU. Press Enter Key to move back to Main menu.

(a) “No update data in PC card”

This message appears if no pertinent reprogramming data exists. No data will be transferred.

(b) “ECU at current level of VCI”

This message appears if the ECU has been already reprogrammed. No data will be transferred.







- (3) Progress is displayed on the monitor.

* mark is increased by steps.

- (4) After completing data transfer, ECU reprogramming starts sequentially.

For next steps, refer to 10-4-4.

ECU Reprogramming

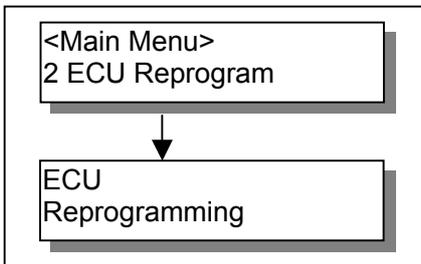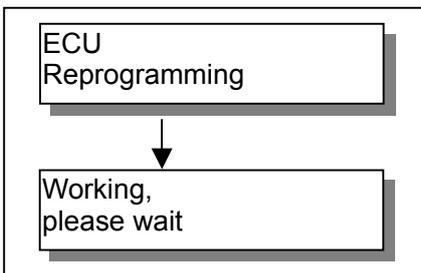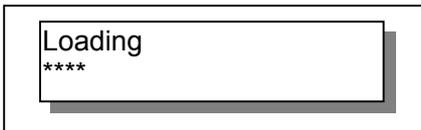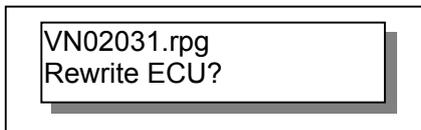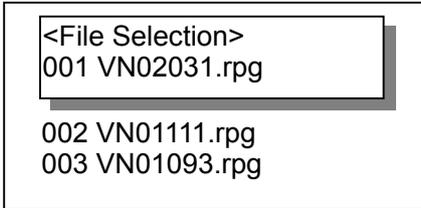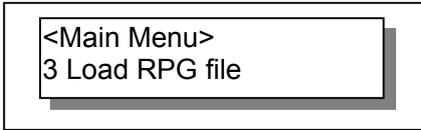

(b). Select and Load Data

- (1) Select "Load RPG file" in main menu by ▼ key, and press Enter key.
- (2) Select a reprogramming data file by ▼ key, and press Enter key.
Esc key: Move back to main menu.
Remark:
-The data files are displayed in numeric order of data No..
(From big to small; new to old)
- (3) Reconfirm the data file No., and press Enter key to start transferring the data into V.C.I. built-in-memory.
Esc Key: Cancel
- (4) Progress is displayed on monitor
* mark is increased by steps.
- (5) After completing data transfer, ECU reprogramming starts sequentially.
For next steps, Refer to 10-4-4.

(c). (Special case)


- (1) If V.C.I. has already stored the reprogramming data, select "ECU Reprogram" in main menu, and press Enter key.
(Refer to 10-4-2.(2)-(4) for setting up the equipments.)

Reprogramming data file No.and program version No. in the V.C.I. memory are displayed for a few seconds, and then ECU reprogramming starts sequentially.

For next steps, refer to 10-4-4.

ECU Reprogramming

10-4-4. Reprogramming ECU (V.C.I.→ Vehicle ECU)

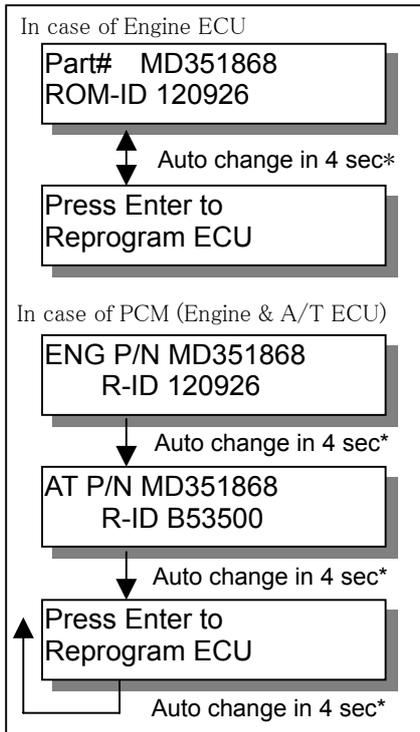


- (1) ECU parts No. and ROM-ID No. are displayed.
Press Enter key to start reprogramming.
ESC / ▼ key : restart V.C.I.

* : By pressing ▼ key, immediately move to next.


Note:

- Reprogramming must carry out on the condition of engine stop and IG switch on.
- Do not disconnect harness/ turn off the IG switch during ECU reprogramming.

[Messages before/during reprogramming process]

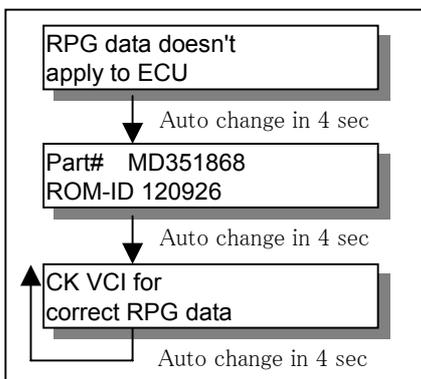


- a) "RPG data doesn't apply to ECU"
Reprogramming stopped owing to the data in V.C.I. memory being not appropriate for the ECU.
- Note down the displayed ECU parts No. and ROM-ID.
 - Restart V.C.I. by pressing Enter key, and confirm the matching of the data file No, which is displayed by reboot, and the ECU part No./ ROM-ID for reprogramming.

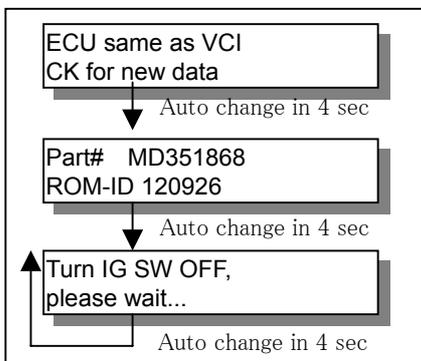

- b) "ECU same as VCI, CK for new data" (CK; check)
Reprogramming stopped because reprogramming has been already done.

ECU Reprogramming

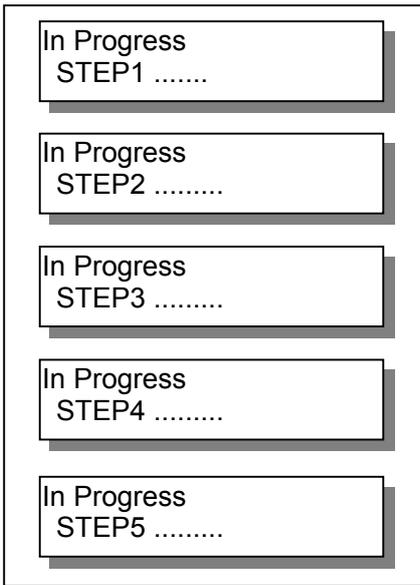

(2) 5 steps progress is displayed while reprogramming.

Caution:

- Do not press any key during reprogramming automatically proceeding.
- Do not turn off V.C.I power or IG switch during reprogramming.


STEP1: Saving the data to the back up memory.

STEP2: Erasing data in ECU.

STEP3: Writing reprogramming data

STEP4: Verifying the data between ECU and V.C.I.


STEP5: Erasing diagnosis code and back up memory

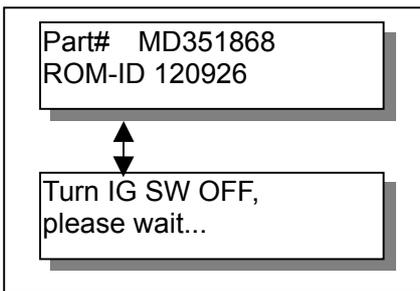

(3) On completion of the 5steps, new reprogrammed ECU parts No. and ROM-ID are displayed.
Turn IG switch LOCK(OFF).

Note:

Diagnosis code might be memorized in ECU if without turning IG switch Lock (off)

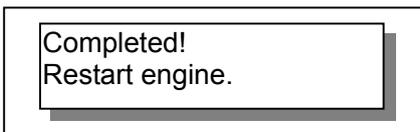

(4) ECU reprogramming completed


Verify the system properly operated by starting engine.

Enter key: V.C.I. restart


10-5. Reprogramming Operation (V.C.I. - PC connected)

10-5-1. Search method Selection


- (1) Press **Special function** button on STV Top Menu.

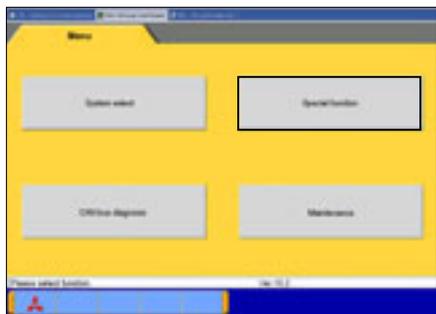

- (2) Press **ECU Reprogramming** button.

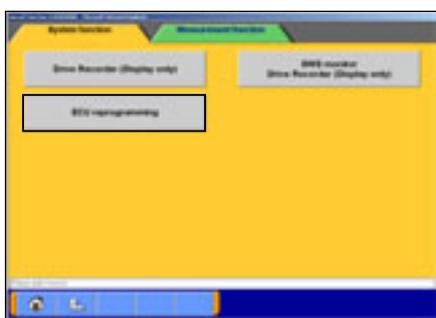

- (3) Select an appropriate button.

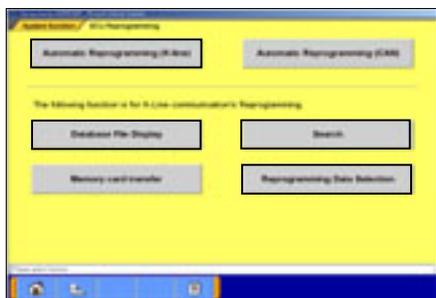

Automatic Reprogramming (K-line) --to 10-5-2(a)

- Automatically searches appropriate Reprogramming data stored in PC.

Database File Display --to 10-5-2(b)

- Shows the list of Reprogramming data stored in PC.

Reprogramming Data Selection --to 10-5-2(c)

- Allows to select Reprogramming data in arbitrary drive and directories.

Search --to 10-5-2(d)

- Allows to search the target data by ECU No., ROM-ID, etc.

- ✧ Connect PC and V.C.I., and prepare following steps.
1. Connect M.U.T.-III Main Harness B or A to V.C.I. securely.
 2. After verifying the ignition switch position at LOCK (OFF), connect the M.U.T.-III Main harness B or A to the vehicle's data-link-connector.
 3. Turn Ignition switch on, and turn V.C.I. main switch on.
(Do not start engine)

ECU Reprogramming

10-5-2. Data Search & Transfer (PC → V.C.I.)


[\(a\). Automatic Data Search](#)

[\(b\). Database File display](#)

[\(c\). Reprogramming Data Selection](#)

[\(d\). Search](#)

(a). Automatic Data Search

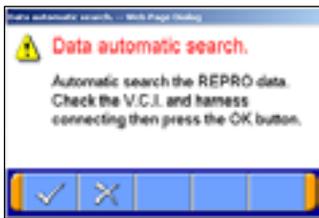

- (1) Press **Automatic Reprogramming (K-line)** button on the function menu, then the left dialog box appears. Verify the connection of V.C.I. and harness, and press . Applicable reprogramming data is searched from database installed in PC automatically.




- (2) Result of the search appears. Select an appropriate data file with scrolling the list using  buttons, and press to start transferring the data into V.C.I. memory.
-After completing the data transfer, ECU reprogramming will start sequentially. (Refer to 10-5-3.)

Note:

Press **OK** button when message window of device removal warning comes out at start and end of data transfer.

(b). Database File display

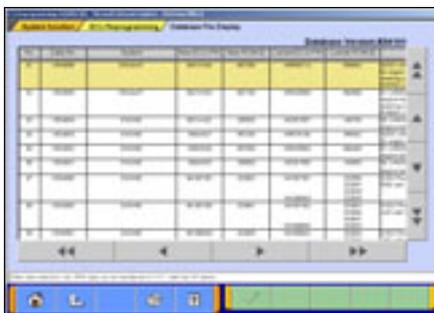

Press **Database File Display** button on the function menu, then the left screen appears.

-Reprogramming data files in the hard disk are listed.

-Select an appropriate data file with scrolling the list using  buttons, and press to start transferring the data into V.C.I memory.

 --10 lines scrolling

-After completing the data transfer, ECU reprogramming will start sequentially. (Refer to 10-5-3.)


Note:

Press **OK** button when message window of device removal warning comes out at start and end of data transfer

ECU Reprogramming

(c). Reprogramming Data Selection

To select the reprogramming data from arbitrary directories.

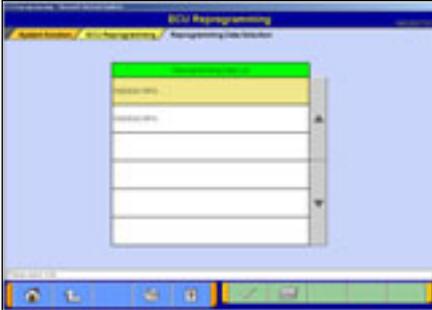

- (1) Press **Reprogramming Data Selection** button on the function menu, then the left screen appears.

 --to select arbitrary drive and directory → (2)

On this screen, select an appropriate data file and press

 to start transferring the data into V.C.I memory.


Note:

-The displayed data as default is in the folder shown below.

C:\Program Files\MUT3\RPGDATA

This directory is the default reprogramming data pool of M.U.T.-III, referred from 10-4-1, 10-5-2(a),(b),(d).

-After completing the data transfer, ECU reprogramming will start sequentially. (Refer to 10-5-3.)

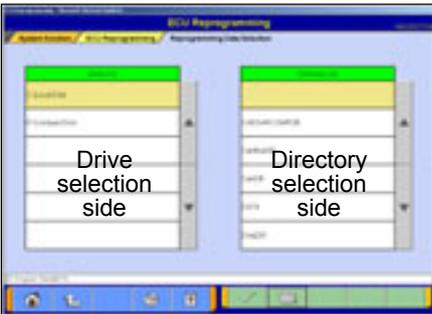

- (2) Data selection

Select a drive on the left chart, and the directories in the drive are displayed on the right chart.

-To move to a lower directory, select appropriate row on the right chart and press  button.


-To move to an upper directory, select  row on the right chart and press  button.

Select appropriate directory name row on the right chart, and press  button to return to (1) and list the files contained in the directory.

ECU Reprogramming

(d). Search


To search the reprogramming data by inputting ECU Part No., ROM-ID, or Data No.

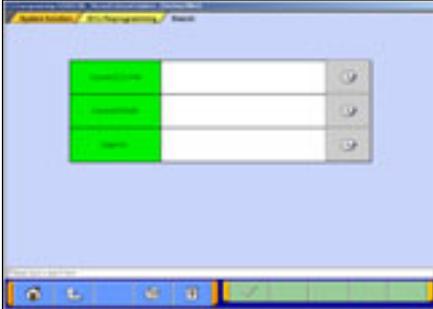

- (1) Press **Search** button on the function menu, then the left screen appears.
Input search key info in the input column, then press .

Note:

- To input, 2 ways can be taken.
 - By PC keyboard
 - By virtual keyboard --press
- Some info need to be a combination with the other info for data search
 - **Current ECU P/N & ROM-ID** need to be together.
 - **Data No.** needs no other info.

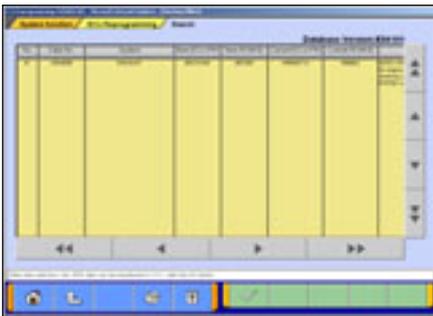

- (2) Results

Select appropriate data with scrolling the list using buttons and press to start transferring the data into V.C.I memory.

--10 lines scrolling

-After completing the data transfer, ECU reprogramming will start sequentially. (Refer to 10-5-3.)


Note:

Press **OK** button when message window of device removal warning comes out at start and end of data transfer.

10-5-3. Reprogramming ECU (V.C.I. → vehicle ECU)


Operate with buttons (in the lower right corner of the screen) according to directions of screen display.

The same operation as 10-4-4. need to be performed on PC screen.

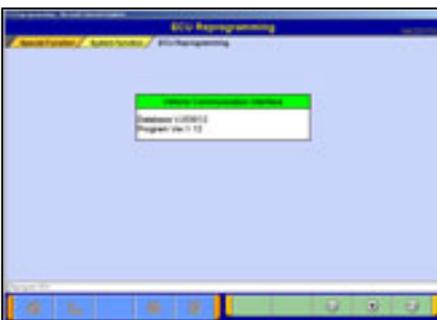


ECU Reprogramming

10-6. Reprogramming by CAN communication

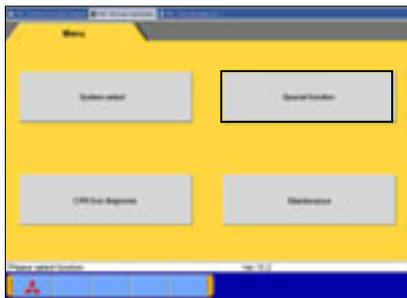

(1) Press **Special Function** button on STV Top Menu.

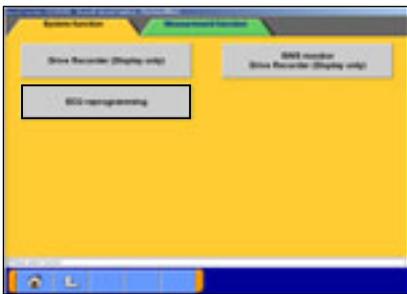


(2) Press **ECU reprogramming** button.



(3) Press **Automatic Reprogramming (CAN)** button.

Note:

Other 5 buttons are for K-line system and not for CAN system.

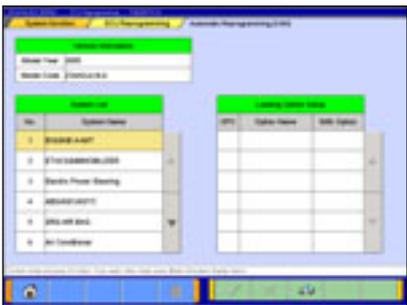


(4) Vehicle choice

-Selected Model year and Model Code of the vehicle are indicated.

-Select a system (ECU) and loading option, and press button.

-If you select other Model year and Model code, press button and select model.

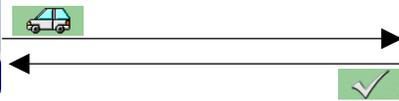

(5) Check

Check all equipment properly then press button.

ECU Reprogramming



- (6) Data search
Searching the target reprogramming data.


Unnecessary reprogramming →
Complete reprogramming →
Target data found ↓



- < **Unnecessary reprogramming** >
- Appropriate reprogramming data is not released.
 - Onboard ECU Part No. and S/W Part No. are indicated.




- < **Complete reprogramming** >
- Onboard ECU has reprogrammed.
 - Onboard ECU Part No. and S/W Part No. are indicated.

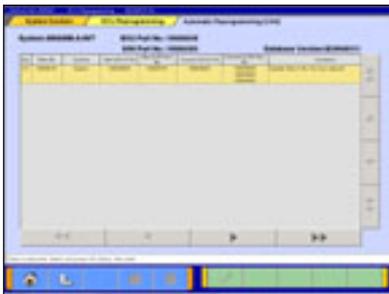

- (7) Data check
-The appropriate reprogramming data is indicated.
-Press button to go to next.



- (8) Reprogramming data check
-Check and press button.
-If you select other repro. data, press button to back.

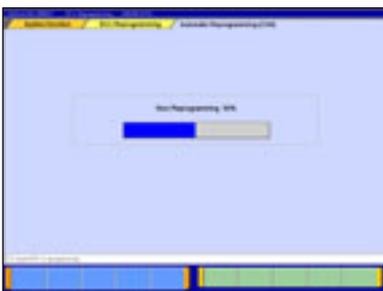

- (9) Reprogramming
Reprogramming on board ECU starts.



- (10) Reprogramming completed
-Reprogramming is completed properly.
-Reprogrammed ECU Part No. and S/W Part No. are indicated.
-Press button, and turn IG switch OFF.

ECU Reprogramming

10-7. Troubleshooting of Reprogramming

10-7-1. Trouble of Reprogramming on K-Line communication

No.	Message	Cause/Remedy
1	During ECU reprogramming <div style="border: 1px solid black; padding: 5px; width: fit-content;">Vehicle battery voltage is low.</div>	<Cause> <ul style="list-style-type: none"> • Due to low battery supplied to V.C.I.. (The voltage of battery falls down 9.7V and below for 5 seconds.) • The V.C.I. has connected to PC without connection to vehicle during retry of reprogramming. <Remedy> 1. Verify the connection between V.C.I. and vehicle, and check the battery carried in the vehicle. Recharge or replace it as needed. 2. Press the V.C.I. "Enter" key to reboot the V.C.I.
2	During ECU reprogramming <div style="border: 1px solid black; padding: 5px; width: fit-content;">Checking ECU Download error.</div>	<Cause> Failed to communicate with ECU during ECU- checking. <Remedy> 1. Turn off the IG switch. 2. Press the V.C.I. "Enter" key and reboot the V.C.I. to restart the procedure.
3	During ECU reprogramming. <div style="border: 1px solid black; padding: 5px; width: fit-content;">ECU-Check error Press Enter key</div>	<Cause> Disagreement of the data in ECU and it in memory card. <Remedy> 1. Press the V.C.I. "Enter" key The reprogramming will be continued using data in memory card.
4	During ECU reprogramming <div style="border: 1px solid black; padding: 5px; width: fit-content;">Download error No. ****</div> <div style="text-align: center; margin: 5px 0;"> ↑↓ Auto change in 4 sec </div> <div style="border: 1px solid black; padding: 5px; width: fit-content;">Press Enter key to retry</div>	<Cause> <ul style="list-style-type: none"> • Disconnect during reprogramming • IG OFF during reprogramming • Communication error • Voltage of battery fall down <Remedy> 1. Verify the connection of harness, and condition of battery carried in the vehicle. 2. Press the V.C.I. "Enter" key and reboot the V.C.I. to retry. (Retry the procedure until the reprogramming completed properly on the error occurred vehicle.) [Error code list] 001A/B : Communication error A/B 002A/B : ECU data erasing error A/B 003A/B : Data writing error A/B 004A/B : Data reading error A/B 004C : Data verifying error 005A : Diagnosis erasing error
5	After select [Automatic RPG] from V.C.I. Main menu. <div style="border: 1px solid black; padding: 5px; width: fit-content;">D/B incorrect Reinstall D/B</div>	<Cause> Reprogramming data base file (MUT-3REP.csv) in the memory card is incorrect. <Remedy> 1. Press the V.C.I. "Enter" key and back to Main menu. 2. Turn off the V.C.I. and eject the memory card from V.C.I.. 3. Insert the memory card into M.U.T.Ⅲ (PC), and transfer the data to the card. Then retry the procedure.


ECU Reprogramming

No.	Message	Cause/Remedy
6	During Automatic RPG with V.C.I.alone. <div style="border: 1px solid black; padding: 5px; width: fit-content;">No response from vehicle ECU</div>	<Cause> • There is no ECU for requiring reprogramming • IG switch not positioned "ON". • Main Harness not connected. <Remedy> 1. Turn off the V.C.I. power. 2. Verify the connection of harness, and condition of harness itself. 3. Verify if the ECU for required reprogramming is installed. 4. Verify if the ECU can communicate with V.C.I. 5. Then redo the procedures.
7	During Automatic RPG with V.C.I.alone. <div style="border: 1px solid black; padding: 5px; width: fit-content;">CK VNxxxxx.rpg In PC card</div>	<Cause> There is no reprogramming data in memory card although ECU is affected for reprogram. <Remedy> 1. Press the V.C.I. "Enter" key and back to Main menu. 2. Turn off the V.C.I. and eject the memory card from V.C.I.. 3. Insert the memory card into M.U.T.-III (PC), and transfer the data to the card. Then retry the procedure.
8	During automatic RPG or Load RPG with V.C.I.alone. <div style="border: 1px solid black; padding: 5px; width: fit-content;">Load error</div>	<Cause> Failure of data transfer from memory card to V.C.I.. <Remedy> 1. Press the V.C.I. "Enter" key and back to Main menu. 2. Retry Automatic RPG or Load RPG again.

10-7-2. Trouble of Reprogramming on CAN communication

N o.	Message	Cause/Remedy
1		< Cause > •No reprogramming data exists for selected vehicle. < Remedy > •Select vehicle type again.
2		< Cause > •Model specifying information (Model Year, Type, Class) is insufficient. < Remedy > Select vehicle type again.
3		< Cause > •No CBF file exists in PC. < Remedy > •Reinstall M.U.T.-III.


ECU Reprogramming

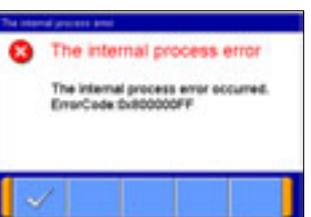N o.	Message	Cause/Remedy
4		<p>< Cause ></p> <ul style="list-style-type: none"> • Connection between V.C.I. and vehicle malfunctioned. • The power switch of V.C.I. is OFF. <p>< Remedy ></p> <ul style="list-style-type: none"> • Confirm connection between V.C.I. and vehicle. • Confirm the power switch of V.C.I.
5		<p>< Cause ></p> <ul style="list-style-type: none"> • No reprogramming data (CFF file) exists in PC. <p>< Remedy ></p> <ul style="list-style-type: none"> • Reinstall reprogramming data (CFF file).
6		<p>< Cause ></p> <ul style="list-style-type: none"> • While reprogramming, an error occurred. <p>< Remedy ></p> <ul style="list-style-type: none"> • Restart reprogramming process from beginning.
7		<p>< Cause ></p> <ul style="list-style-type: none"> • Diagnosis cord couldn't be erased. <p>< Remedy ></p> <ul style="list-style-type: none"> • Erase the DTC by diagnosis function of M.U.T.-III.
8		<p>< Cause ></p> <ul style="list-style-type: none"> • An error occurred in accessing database to search reprogramming data. <p>< Remedy ></p> <ul style="list-style-type: none"> • Reinstall M.U.T.-III.
9		<p>< Cause ></p> <ul style="list-style-type: none"> • The internal process error occurred on database to search the reprogramming data. <p>< Remedy ></p> <ul style="list-style-type: none"> • Reinstall M.U.T.-III.

Chapter 11 Measurement Functions


11-1. Injector-Type Fuel Consumption Measurement

11-1-1. Function Select

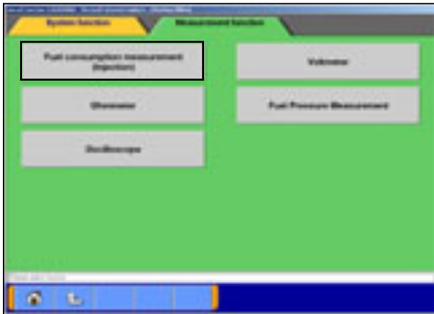

- (1) Press **Special function** button on the STV Top Menu (illustrated on 3-2), then select **Measurement Functions** tab on the upper part of the screen.

Press **Fuel consumption measurement (Injection)** button on this menu screen.

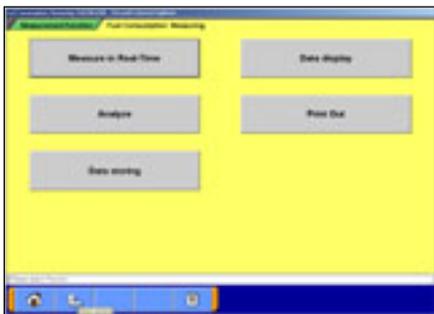

- (2) Function Selection

Measurements in Real-time -- to 11-1-2.


Data Display -- to 11-1-3.

Analyze -- to 11-1-4.

Print out -- To print out the view graph.

Data storing -- To load the data, which is stored in a removal disc, onto the PC.

11-1-2. Measurement in Real-time

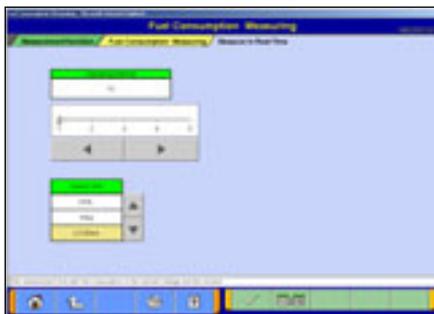

- (1) Preparations Prior to Measurement

Set the sampling interval, and select the displayed unit of measurement by pressing the **▲ ▼** buttons.

If you wish to select display items, press **☰** button.

When the setting complete, press **✓** button.

Note:

The amount of recording time is proportional determined by the length of the sampling interval.




- (2) Entering and Recording Record Information

Enter your user name and the vehicle model type.

✓ button starts the measurement process.

Measurement Functions

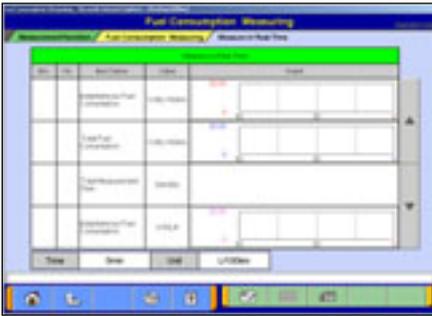

(3) View Graph

The data of 4 items/4 graphs are displayed.

-Pressing  button stops recording.

-Once recording has been stopped, the data is automatically saved.

 --View Text To (4).

Note:

The file name is set as "FU+Year Month Day+Time (military time including seconds)".




(4) View Text

 --View Graph To (3)

 --Stop Record

11-1-3. Data Display

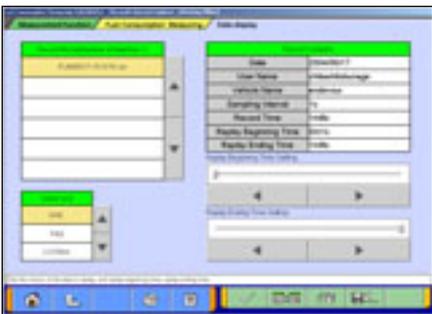


(1) Select a record file containing the data you wish to check. Set the necessary speed range with  , and select unit of measurement with  .

Then press  button.

 --Delete Data

 --Select item

 --Save Data

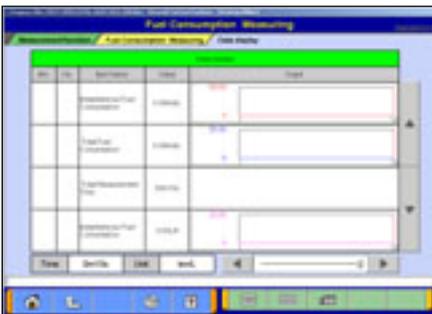

(2) View Graph

The data of 4 items/4 graphs are displayed.

Pressing   buttons or moving the slide bar displays the value of the cursor line.

 --View Text To (1)

 --Change displayed Unit




(3) View Text

 --View Graph To (2)

 --Change displayed Unit

Measurement Functions

11-1-4. Performing Simplified Analysis

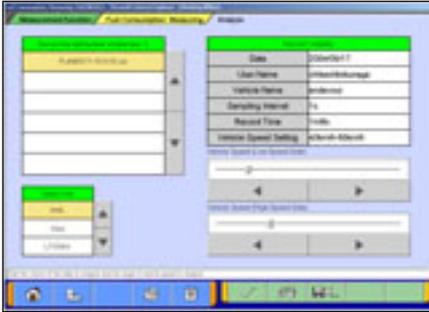

- (1) Select a record file containing the data you wish to analyze. Set the necessary speed range and displayed unit of measurement, and then press  button.

 --Delete Data

 --Save Data



- (2) Viewing Analysis Results

 ---Change displayed Unit

11-2. Fuel pressure, Voltage, Ohmmeter, Oscilloscope

11-2-1. Measuring Fuel Pressure (Not available in US)


The fuel pressure can be measured using pressure gauge (LP: MB991655 or MB991979 / HP: MB991708 or MB992007), and displayed as text or graph style on PC.




- (1) Measuring the Calibration Volt

To adjust manufacturing difference of solid state in each pressure gauge, you need to input its calibration value. Please measure the calibration value as follows.

- Connect the pressure gauge to cigarette lighter socket, and to V.C.I. (Don't put the pressure gauge on the fuel pipeline yet.)
- Press **Voltmeter** on the menu screen of 11-1-1(1).
- The displayed voltage is the calibration value of the gauge.

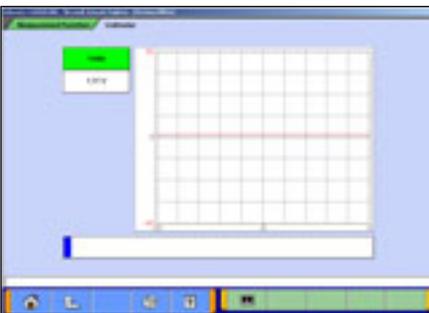


Measurement Functions

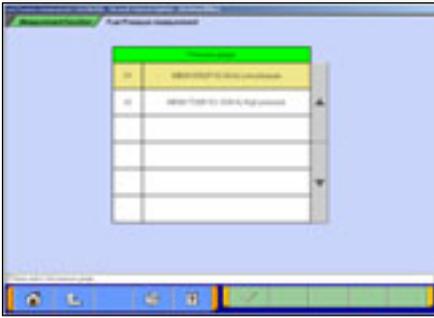

- (2) Put the pressure gauge on the fuel pipeline.
Press **Fuel Pressure Measurement** on the menu screen of 11-1-1(1).
The selection screen of pressure gauge appears. Select a pressure gauge and press  button.



- (3) Entering the Calibration value
Enter the calibration volt which you measured in (1), and press  button.

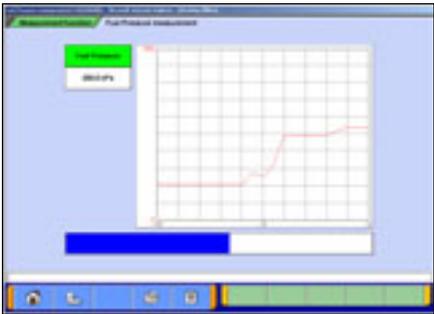

- (4) Measuring Fuel Pressure
The measured value is displayed on the graph.

11-2-2. Measuring Voltage and Resistance




- (1) Press **Voltmeter** or **Ohmmeter** on the menu screen of 11-1-1(1).
The voltage or resistance value comes from the test leads connected to the trigger terminal and displayed on the PC screen.
-For details on how to connect the measurement probe, and details for measuring using V.C.I. alone, refer to 2-2-3.
-Prior to executing the measurement process, calibrate the instrument to 0 using  button.

Note:

- DC voltage can be measured in the range of 0-±40V.
- Resistance can be measured in the range of 0-100KΩ.

11-2-3. Oscilloscope Function

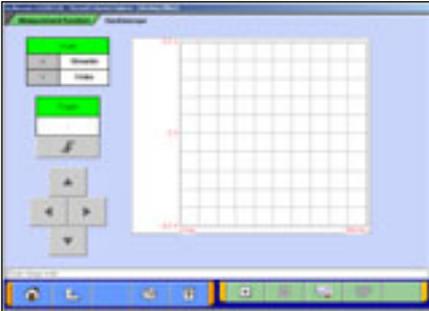

- (1) Press **Oscilloscope** on the menu screen of 11-1-1(1).


This function allows you to observe the continuous waveform, which is loaded from the voltage measurement terminal, on PC screen using test leads (MB991499, etc).

-  --Starts the waveform display
-  --Stops the waveform display
-  --Switches to Scale mode
: to set the time axis and voltage axis --(2)
-  --Switches to Trigger mode
: to set trigger conditions --(3)

Note:

DC voltage can be measured in the range of 0-±40V, and resolution can be measured at 0.1V.

The shortest sampling interval is 500µs.

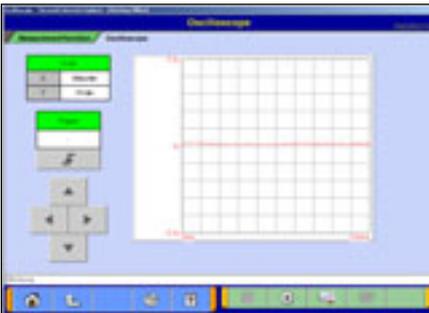

- (2) Setting the Time Axis and Voltage Axis


 button switches to the scale mode, and the     buttons can be used to set time axis and voltage axis.

-   --Changes time axis scale
-   --Changes voltage axis scale

Note:

Time scale: (10,20,40,100ms/div)

Voltage scale: (1,2,5,8V/div)

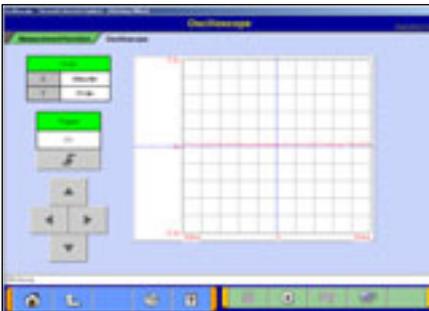

- (3) Setting Trigger Conditions

 button switches to the trigger setting mode, and a trigger point can be changed by the     buttons.

-  --Up Trigger
-  --Down Trigger

Individual Troubleshooting Procedures

Chapter 12 Troubleshooting Procedures

12-1. Individual Troubleshooting Procedures

This chapter describes troubleshooting guidelines for the causes of main error messages as well as error symptoms.

Note:

- The messages described herein sometimes appear simultaneously with other screens.
- For details regarding circuit inspection, see the electrical wiring diagrams of the applicable vehicle.
- Communications lines are determined by the system and communication method.
- For details regarding the data-link-connector terminal configuration, see the electrical wiring diagrams of the applicable vehicle.

No.	Message/Symptom	Cause	Remedy
1	The V.C.I. does not power up when connected to the vehicle correctly. Be sure the IG switch is ON.	Vehicle power supply failure due to: <ul style="list-style-type: none"> • V.C.I. switch turned OFF • Low battery • Vehicle harness not connected or a short exists • Hardware error 	<ol style="list-style-type: none"> 1. Verify that the V.C.I. switch is ON. 2. Verify the vehicle battery is sufficiently charged (12V). 3. Disconnect and reconnect the connector. 4. Check if there is a short in the harness. (Try using a different harness.) 5. If the problem is not resolved by remedies 1-4, there may be a hardware error. Request inspection with the harness.
2	The V.C.I. does not power up from the PC connection with the USB cable. V.C.I. is not connected to vehicle at this time.	PC power supply failure due to: <ul style="list-style-type: none"> • PC power not activated • USB cable not connected or a short exists • Hardware error (PC or V.C.I.) 	<ol style="list-style-type: none"> 1. Verify that PC is ON. 2. Verify that appropriate USB cable is firmly connected between the PC and V.C.I. (Do not use a USB hub.) 3. Disconnect and reconnect the connector. 4. Check if there is a short in the cable. (Try using a different harness.) 5. If the problem is not resolved by remedies 1-4, there may be a hardware error. Request inspection with the PC.
3	The screen "Maintenance Mode" appears as soon as the V.C.I. is powered up.	V.C.I. was powered on with pressing "Esc" key.	<ol style="list-style-type: none"> 1. Turn the V.C.I. OFF. 2. Disconnect USB cable and connector. 3. Turn the V.C.I. power ON. (Do not touch "Esc" key.) 4. If the "Main Menu" or "PC Communication" display does not appear, the V.C.I. may be at fault. Request inspection.

Individual Troubleshooting Procedures

No.	Message/Symptom	Cause	Remedy
4	The screen "ECU Reprogramming" appears as soon as the V.C.I. power is activated.	The V.C.I. basic application has not been installed.	<ol style="list-style-type: none"> 1. Connect the unit to the PC (for power activation) while pressing the V.C.I. "Esc" key. 2. Verify that the V.C.I. screen display indicates "Maintenance Mode". 3. In order to install the V.C.I. basic application, using the automatic version upgrade feature, start the PC M.U.T.-III diagnostic application and attempt diagnosis. (refer to 3-3-1) 4. As "Setup V.C.I." dialog box appears on PC screen during the diagnosis, press <input checked="" type="checkbox"/> button. 5. When "Update" dialog box disappears on PC screen, the install is completed. 6. If, once the application has been downloaded and the V.C.I. power has been reactivated, the "Main Menu" or "PC Communication" display does not appear, request inspection.
5	The screen "Drive Recorder [1] Record error" appears during recording the Drive recorder with V.C.I. alone.	Communication error	<ol style="list-style-type: none"> 1. Press the V.C.I. "Enter" key. 2. Verify that the V.C.I. screen display indicates "Drive Recorder Continue? ", press the "Enter" key or wait 10seconds to start recording again.

Chapter 13 Reference Material

13-1. V.C.I. Electrical Properties

<Power Supply Properties>

<u>Rated voltage</u>	<u>DC12V, 24V</u>
<u>Ground polarity</u>	<u>(-)</u>
<u>Power supply (guaranteed operation range)</u>	<u>DC 8.0 - 32.0 V</u>
<u>Power supply reverse current</u>	<u>DC - 40 V (1 minute period)</u>
<u>Unit current consumption (maximum)</u>	<u>1A</u>

(When voltage is within the guaranteed operation range)

- ◆ Excludes conditions when the voltage is not within the guaranteed operation range and special conditions such as when a ground short occurs on an updated control terminal, etc.

The amount of current consumption when the unit is used with rated power supply is 420mA or less.

Appendix

<< Terminology >>

In alphabetical order

A

AMT: Abbreviation for Automated Manual Transmission Electronic Controlled Unit.

ASC: Abbreviation for Active Stability Control System.

C

CAN: Abbreviation for Controller Area Network. A system that shares data between ECUs through communication. The processing of each command (signal) is possible using a communication line only.

D

Data transmission: The transmission of data stored from one memory area to another memory area. In the case of M.U.T.-III, this refers to the transmission of data from the V.C.I. memory area to the PC.

Default: Initial setting. A predetermined value that is set when an item that should be defined is not defined.

Diagnosis: Refers to the self-diagnosis function. A system in which the ECU installed in the vehicle monitors input signals from the various sensors and switches and, when an error occurs or erroneous information is identified, records the data in memory.

E

ECU: Abbreviation for Electronic Control Unit. The control unit of the electronic control system.

EPS: Abbreviation for Electric Power Steering

I

I/F cartridge: A cartridge used when the ECU communication method employed is a special method or when M.U.T.-III functions have been expanded and support is not possible by the M.U.T.-III unit alone. The various I/F cartridges, such as the cartridge for the SWS monitor set in M.U.T.-II or the cartridge for DCC communication, can be used as is.

M

Memory card: A medium used to store data. Records data such as those used for ECU updates. With M.U.T.-III, flash memory is employed which allows the user to electrically change the data as well as maintain the information even if the power is turned off. Batteries are not required.

O

Online help: Also referred to as the online manual. An operation manual loaded on M.U.T.-III, which gives easy-to-understand explanations on how to use the various functions. It also provides processing methods related to the operation currently performed when the user is unsure how to perform an operation during application use.

R

RAM: Abbreviation for Random Access Memory. A memory device that is capable of both read and write operations. The information stored in this device is lost when the power is turned off.

ROM: Abbreviation for Read Only Memory. A memory device that is capable of read operations only. The information stored in this device is maintained even when the power is turned off.

S

Serial communication: A method in which the bits that make up digital data are transmitted in series one bit at a time on the communication line. The reading of diagnostic code via communication from the ECU using the M.U.T. is referred to as "Pattern Diagnosis."

Slide bar: A method in which a value is entered by moving a bar.

SWS: Abbreviation for Smart Wiring System. A system that centrally controls multiple electrical signals on one harness, thereby minimizing the number of harnesses used. The SWS led to the development of the multiplex transmission system, making harness weight reduction and the development of multifunctional electrical components possible.

V

V.C.I.: Abbreviation for Vehicle Communication Interface. The communication interface used to connect the ECU mounted in the vehicle with a PC.

Screen Button Explanations

<< Screen Button Explanations >>

The name and function of each button icon are described below.

Button Image	Button Name	Button Function	Button Image	Button Name	Button Function
	Main menu	Close the M.U.T.-III Screen.		Add	Adds items.
	Home	Returns the screen to the STV Top menu screen.		View V.C.I. Regeneration data	Displays a list of V.C.I. Regeneration data.
	Return one level	Returns the screen to the upper layer screen.		Delete file	Deletes files.
	Cancel	Cancels the operation or closes the screen.		Previous page	Displays the previous page.
	Help	Displays online help.		Next page	Displays the next page.
	OK or YES	Determines an outcome.		End recording	Ends the recording.
	Print screen	Print the screen image.		Manual trigger	Generates a manual trigger.
	Information	Displays information.		Transmit data	Transmits the data of the selected block to the PC.
	View vehicle information	Displays vehicle information.		Save data	Saves the selected data files to a removable disk.
	Erase	Erase Diagnosis data		Alphanumeric input screen	Opens the alphanumeric input screen.
	History	Displays history of vehicle information settings.		Trigger point data	Jumps to the trigger point.
	View graph1	Displays four items on four graphs.		Data extraction settings	Opens the extraction condition setting screen.
	View graph2	Displays (overwrites) four items on one graph.		Data search settings	Opens the search condition setting screen.
	View text	Displays text.		Correlation chart	Opens the correlation chart setting screen.
	Change time scale	Changes the graph display time scale.		Distribution map	Opens the distribution chart setting screen.
	Change data scale	Changes the graph display data scale.		Time setting	Opens the Time extraction/search condition setting screen.
	Select item	Opens the item selection screen.		1/2	Change of function button (1/2 display)
	Sort	Sorts the list into default order.		2/2	Change of function button (2/2 display)
	Run	Starts the item.		1/3	Change of function button (1/3 display)
	Stop	Stops the item.		2/3	Change of function button (2/3 display)
	Pause	Pause		3/3	Change of function button (3/3 display)

Screen Button Explanations

Button Image	Button Name	Button Function	Button Image	Button Name	Button Function
	Save to HDD	Save to Hard drive.		Esc	ESC Key function of V.C.I.
	Disconnect cartridge	Disconnects the SWS monitor cartridge.		Enter	Enter Key function of V.C.I.
	Start diagnosis	Starts diagnosis and displays the result.		Down arrow	Down arrow Key function of V.C.I.
	Related information	Related information		Bookmark	Displays bookmarks (pages with bookmarks).
	Zero point calibration	Corrects the calibration on measurement function.		View MSB	Displays MSB to check revision points of the Service manual.
	Change unit	Changes the displayed unit of measurement.		Document information	Displays document information.
	Change scale	Changes the scale.		Connector index	Displays the connector index.
	Trigger setting	Sets the trigger on Oscilloscope function.		Search List	Returns the screen to the search list screen.
	Up trigger	Generates a trigger at the time of a rise.		Group top	Returns the screen to the list of the presently displayed groups (or to the list of reference groups)
	Down trigger	Generates a trigger at the time of a fall.		Previous display	Returns the screen to the previously displayed screen.
	Select drive	Opens the drive selection screen.		Zoom in	Enlarges the display.
	Select folder	Opens the selected folder.		Zoom out	Reduces the display.